

Square and Rectangle Ceiling Panels


711.24.10.000.00
711.24.11.000.00
711.24.12.000.00

711.24.15.000.00
711.24.13.000.00
711.24.14.000.00

711.24.16.000.00
711.24.14.000.10
711.24.14.000.12

Rectangular Ceiling Panels

General Information

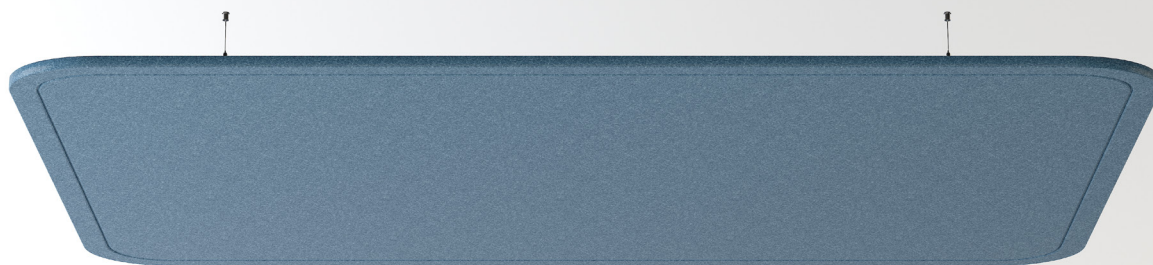


Data

Applicable article numbers

711.24.10.000.00	711.24.13.000.00	711.24.16.000.00
711.24.11.000.00	711.24.14.000.00	711.24.14.000.10
711.24.12.000.00	711.24.15.000.00	711.24.14.000.12

Dimensions¹

Width	600-1800mm	23.62" or 70.87"
Length	1200-2400mm	47.24" or 94.49"
Material thickness	24mm	0.94"



Custom solutions available

Material

Panel	100% PET (60% post-consumer) in 32 colors.
Frame <i>(option)</i>	Stainless steel



Extended document available

Weight²

24mm PET Material	4kg/m ² kg (±10%)	0.82 lbs/ft ² (±10%)
-------------------	------------------------------	---------------------------------


(for specific product weight please refer to Geometry Information pages 6-14)

Included

Ceiling Panel



Installation Kit



Installation
guide



Warranty
2 years³




1 - all dimensions are nominal 2 - all weight values are nominal 3 - Impact Acoustic warranty terms apply

Rectangular Ceiling Panels


Specification Guide

Ensure you make the perfect choice by choosing our solutions for your next project. To get started, simply define some basic information and constraints about your space. Then explore our range of standard solutions or contact us directly for a more in-depth discussion of personalised customized options.

1 Prepare this information:




Ceiling Plans (RCP)




Ceiling Type


2 Specify your Baffles:



Size
page 5 and 6




Number of Modules
page 4




Color
page 15

3 Verify installation method:



Direct gripper




Profile and clip

Rectangular Ceiling Panels

Product Family Overview


1 Ceiling Panels Square

711.24.10.000.00 - Ceiling Panel Square

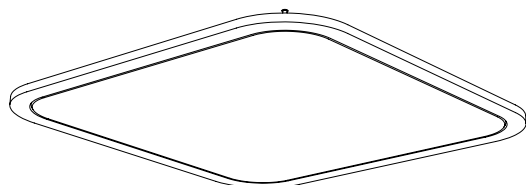

(W1200 L1200)
(W47.24" L47.24")


711.24.11.000.00 - Ceiling Panel Square

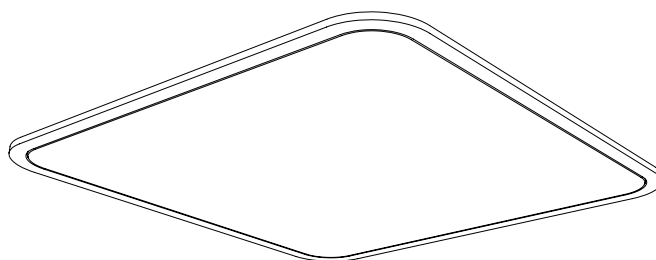

(W1800 L1800)
(W70.87" L70.87")


2 Ceiling Panels Rectangle

711.24.12.000.00 - Ceiling Panel Rectangle

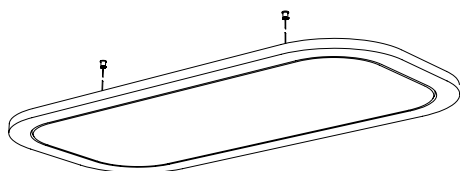


(W600 L1200)
(W23.62" L47.24")

711.24.13.000.00 - Ceiling Panel Rectangle

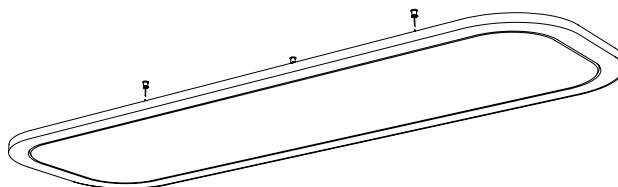

(W600 L1800)
(W23.62" L70.87")

711.24.14.000.00 - Ceiling Panel Rectangle

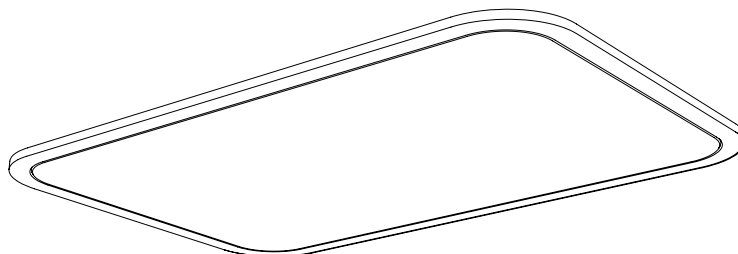


(W1200 L1800)
(W47.24" L70.87")

Rectangular Ceiling Panels

Product Family Overview


3 Ceiling Panels Rectangle with support

711.24.15.000.00 - Ceiling Panel Rectangle

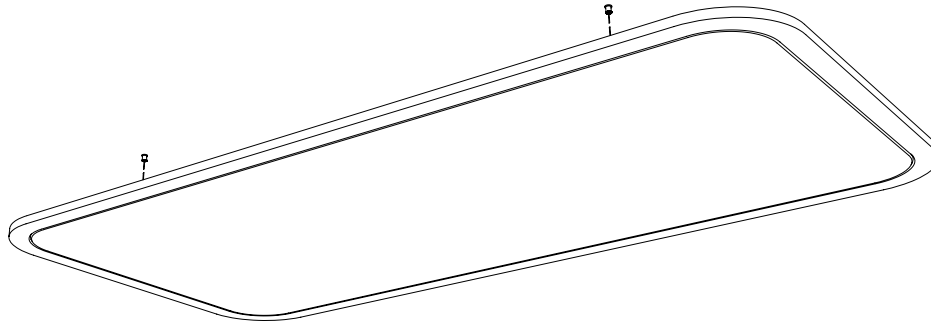

(W1200 L2400 support frame)
(W47.24" L94.49")

711.24.16.000.00 - Ceiling Panel Rectangle

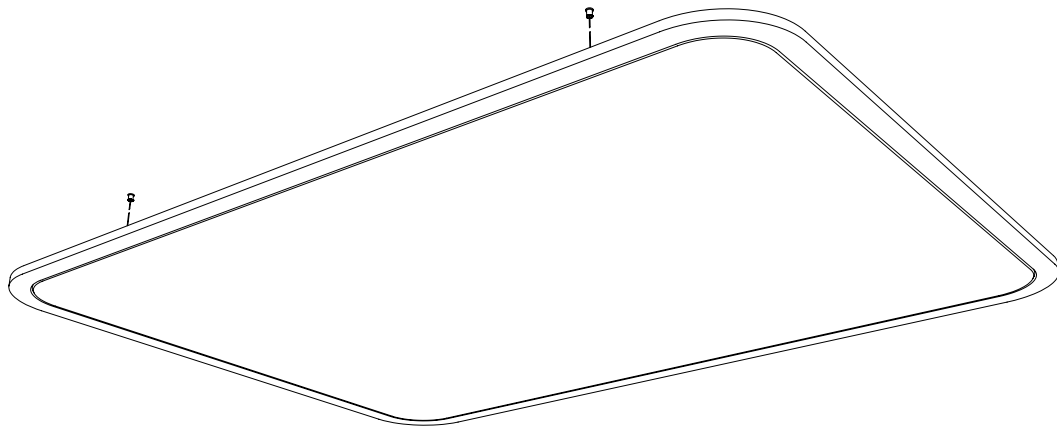


(W1800 L2400 support frame)
(W70.87" L94.49")

Rectangular Ceiling Panels

Custom solutions available

Geometry Information

Ceiling Panel Square 711.24.10.000.00

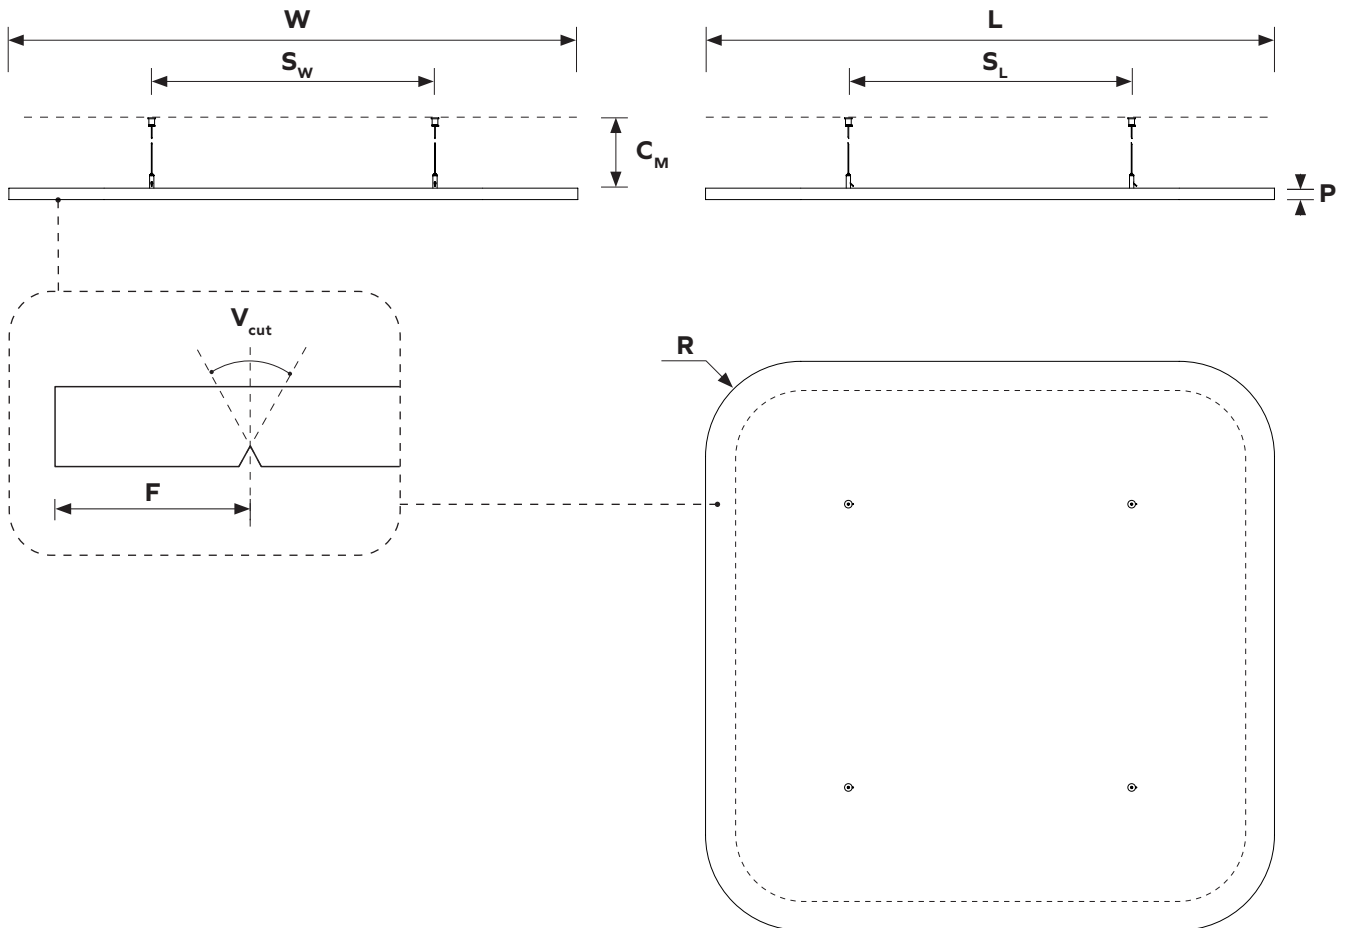

Dimensions table¹

W	Total width	1195mm	47.05"
L	Total length	1195mm	47.05"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_W	Support spacing W	595mm	23.43"
S_L	Support spacing L	595mm	23.43"
P	PET material thickness	24mm	0.94"
F	V-cut offset	60mm	2.36"
V_{cut}	V-cut angle	60° (2 sides 30° V-cut) - 6mm (0.24") depth	

Weight table²

PET panel	5.56 kg	12.26 lbs
-----------	---------	-----------


1 - all dimensions are nominal 2 - all weight values are nominal

Rectangular Ceiling Panels

Custom solutions available

Geometry Information

Ceiling Panel Square 711.24.11.000.00

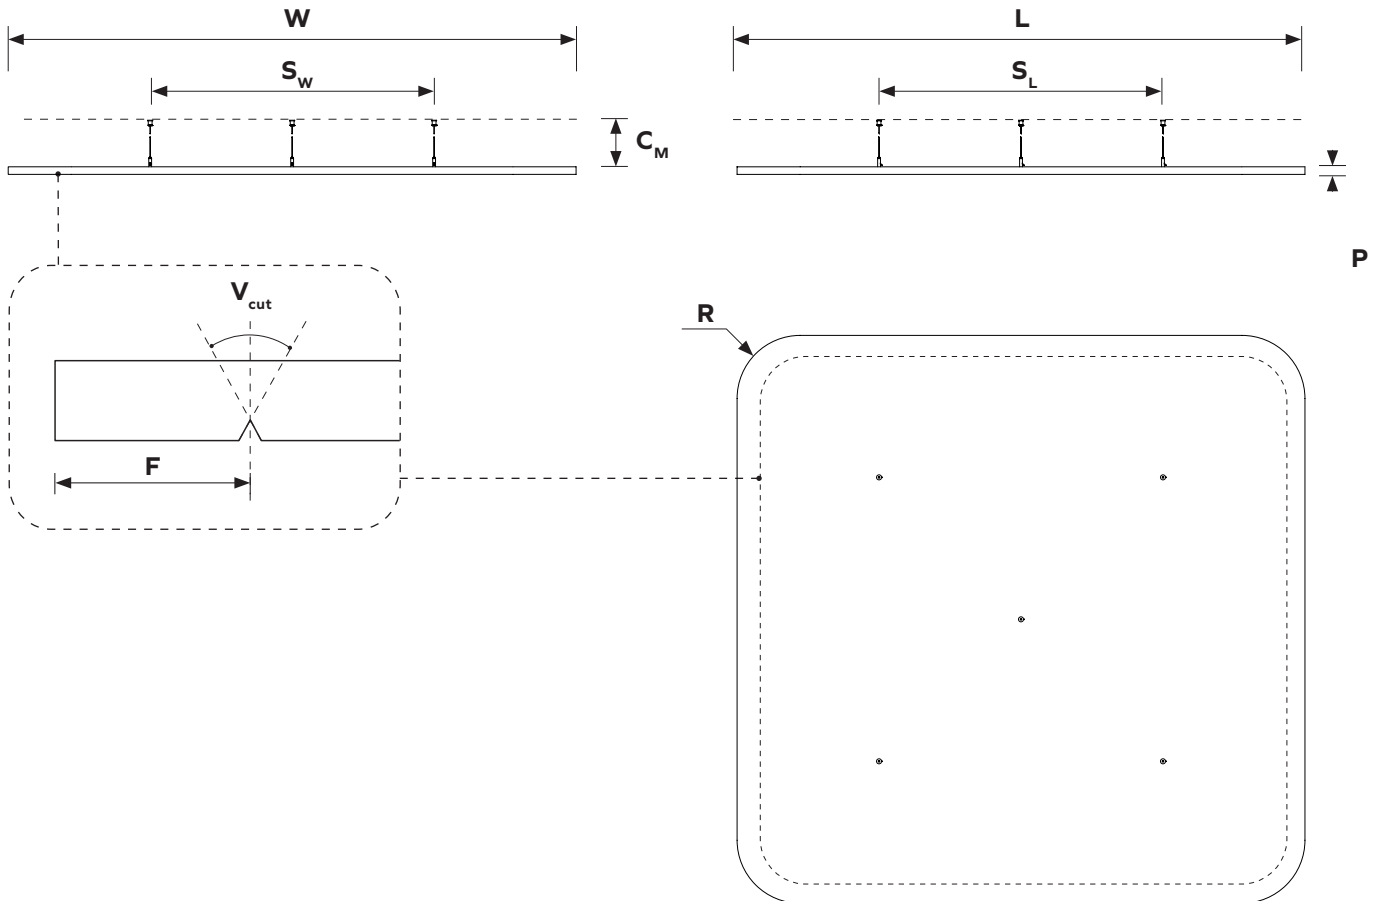

Dimensions table¹

W	Total width	1800mm	70.87"
L	Total length	1800mm	70.87"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_W	Support spacing W	900mm	35.43"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"
F	V-cut offset	60mm	2.36"
V_{cut}	V-cut angle	60° (2 sides 30° V-cut) - 6mm (0.24") depth	

Weight table²

PET panel	12.8 kg	28.22 lbs
-----------	---------	-----------


1 - all dimensions are nominal 2 - all weight values are nominal

Rectangular Ceiling Panels

Custom solutions available

Geometry Information

Ceiling Panel Rectangle 711.24.12.000.00

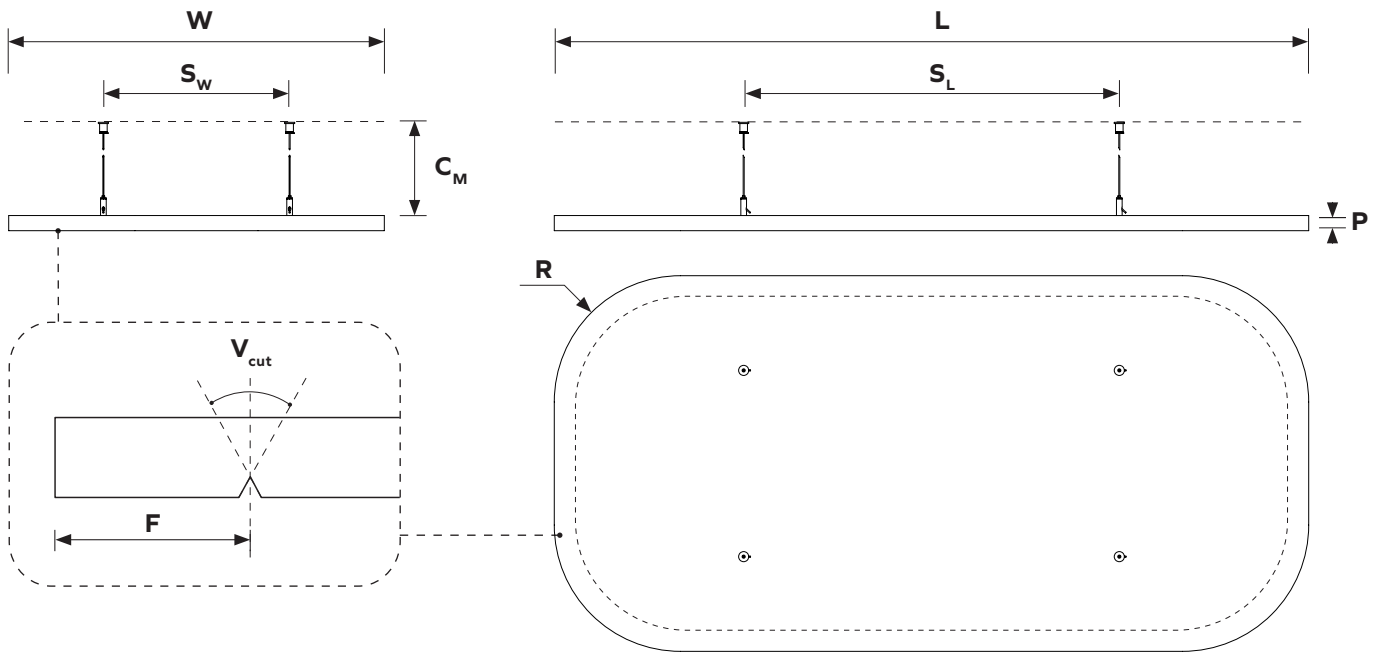

Dimensions table¹

W	Total width	595mm	23.43"
L	Total length	1195mm	47.05"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	295mm	11.61"
S_L	Support spacing L	595mm	23.43"
P	PET material thickness	24mm	0.94"
F	V-cut offset	60mm	2.36"
V_{cut}	V-cut angle	60° (2 sides 30° V-cut) - 6mm (0.24") depth	

Weight table²

PET panel	2.72 kg	6.00 lbs
-----------	---------	----------


1 - all dimensions are nominal 2 - all weight values are nominal

Rectangular Ceiling Panels

Custom solutions available

Geometry Information

Ceiling Panel Rectangle 711.24.13.000.00

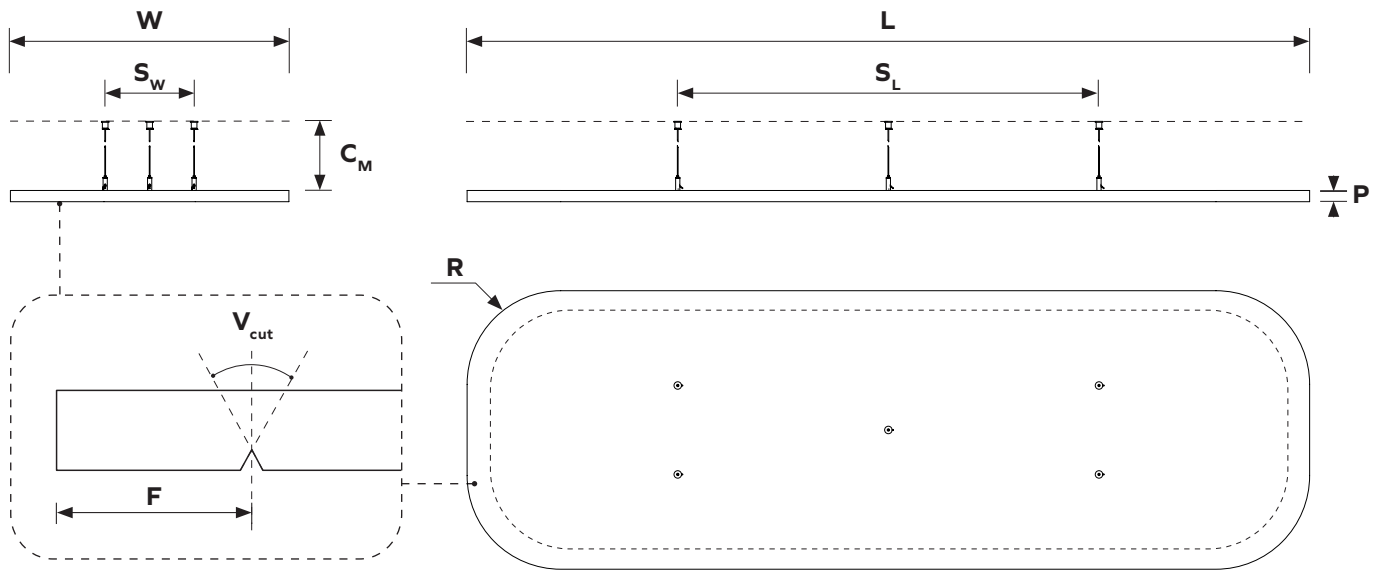

Dimensions table¹

W	Total width	595mm	23.43"
L	Total length	1800mm	70.87"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_W	Support spacing W	295mm	11.61"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"
F	V-cut offset	60mm	2.36"
V_{cut}	V-cut angle	60° (2 sides 30° V-cut) - 6mm (0.24") depth	

Weight table²

PET panel	4.42 kg	9.74 lbs
-----------	---------	----------


1 - all dimensions are nominal 2 - all weight values are nominal

Rectangular Ceiling Panels

Custom solutions available

Geometry Information

Ceiling Panel Rectangle 711.24.14.000.00

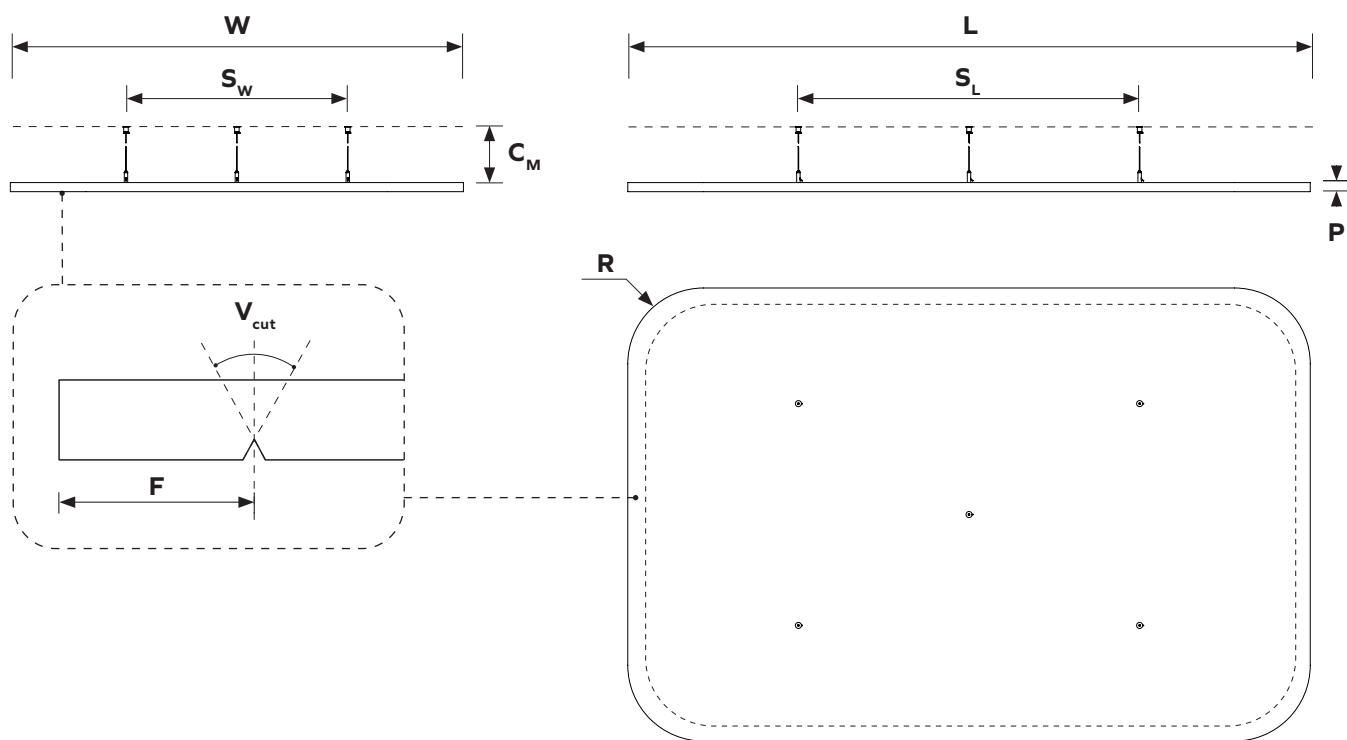

Dimensions table¹

W	Total width	1195mm	47.05"
L	Total length	1800mm	70.87"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_W	Support spacing W	585mm	23.03"
S_L	Support spacing L	900mm	35.43"
P	PET material thickness	24mm	0.94"
F	V-cut offset	60mm	2.36"
V_{cut}	V-cut angle	60° (2 sides 30° V-cut) - 6mm (0.24") depth	

Weight table²

PET panel	8.44 kg	18.61 lbs
-----------	---------	-----------


1 - all dimensions are nominal 2 - all weight values are nominal

Rectangular Ceiling Panels

Custom solutions available

Geometry Information

Ceiling Panel Rectangle 711.24.15.000.00

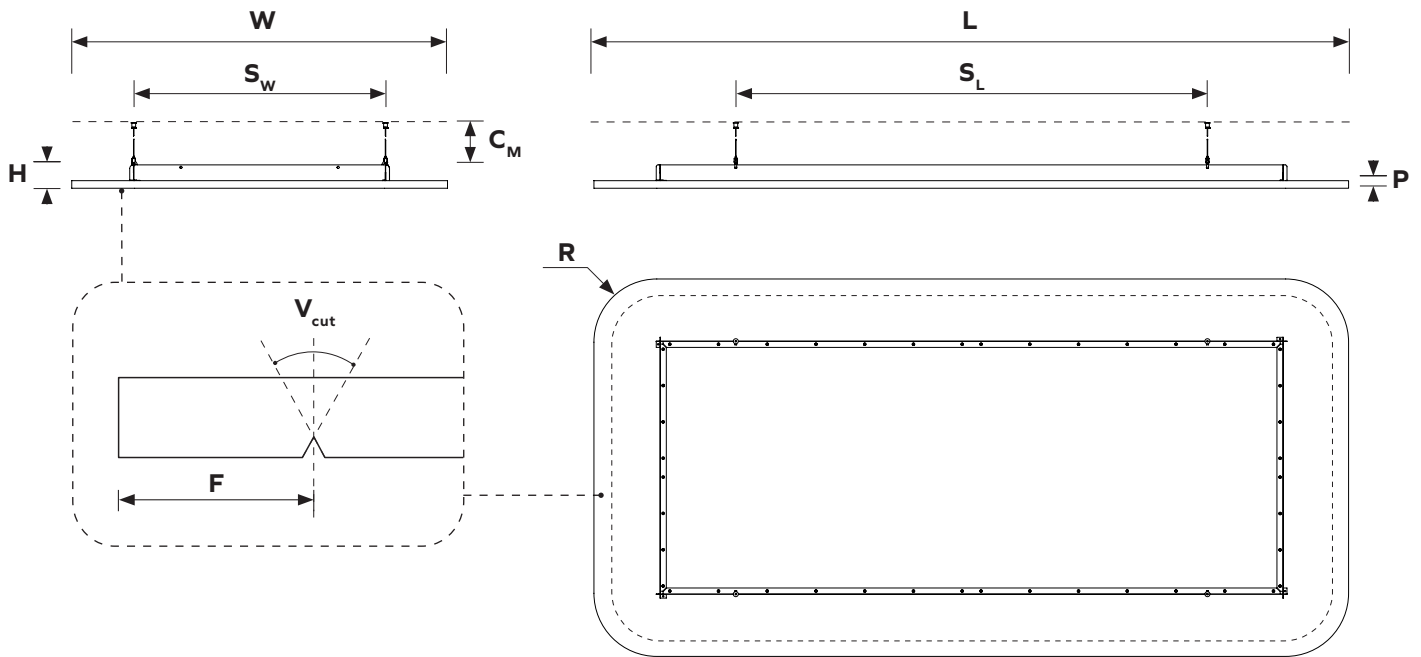

Dimensions table¹

W	Total width	1195mm	47.05"
L	Total length	2400mm	94.49"
C_M	Distance from ceiling	min. 100mm	min. 4"
H	Total Height	74mm	2.91"
S_W	Support spacing W	800mm	31.50"
S_L	Support spacing L	1500mm	59.06"
P	PET material thickness	24mm	0.94"
F	V-cut offset	60mm	2.36"
V_{cut}	V-cut angle	60° (2 sides 30° V-cut) - 6mm (0.24") depth	

Weight table²

PET panel	11.32 kg	24.96 lbs
Steel profiles	3.04 kg	6.70 lbs


1 - all dimensions are nominal 2 - all weight values are nominal

Rectangular Ceiling Panels

Custom solutions available

Geometry Information

Ceiling Panel Rectangle 711.24.16.000.00

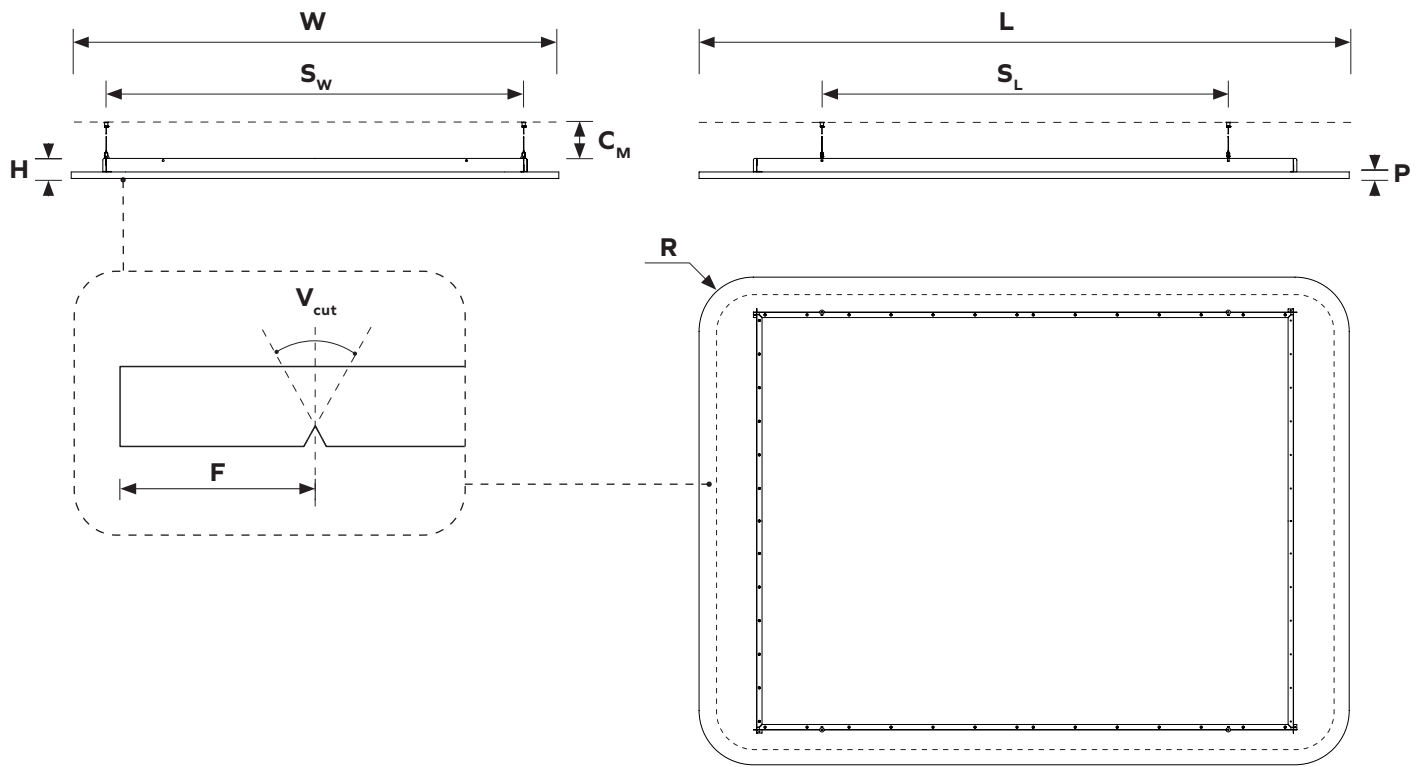

Dimensions table¹

W	Total width	1800mm	70.87"
L	Total length	2400mm	94.49"
C_M	Distance from ceiling	min. 100mm	min. 4"
H	Total Height	74mm	2.91"
S_W	Support spacing W	1540mm	60.63"
S_L	Support spacing L	1500mm	59.06"
P	PET material thickness	24mm	0.94"
F	V-cut offset	60mm	2.36"
V_{cut}	V-cut angle	60° (2 sides 30° V-cut) - 6mm (0.24") depth	

Weight table²

PET panel	17.14 kg	37.79 lbs
Steel profiles	3.84 kg	8.47 lbs

1 - all dimensions are nominal 2 - all weight values are nominal

Rectangular Ceiling Panels

Installation Overview


 Extended document available

Applicable article numbers

711.24.10.000.00	711.24.13.000.00	711.24.14.000.10	711.24.12.000.00
711.24.11.000.00	711.24.14.000.00	711.24.14.000.12	


1 Attach mounting hardware

Measure the right spacing according to the X marks on the panel and attach mounting cables to the ceiling.

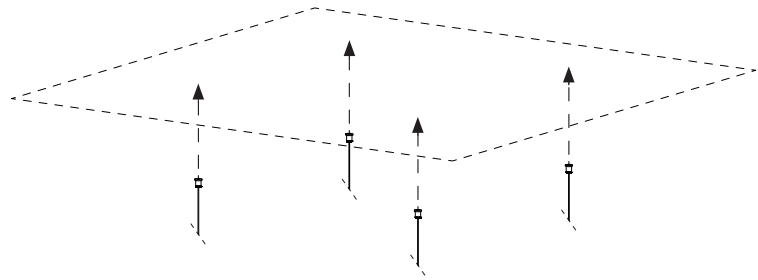



2 Attach grippers to the panel

Screw the cable grippers into the panel at the locations indicated by X mark on the panel back surface.

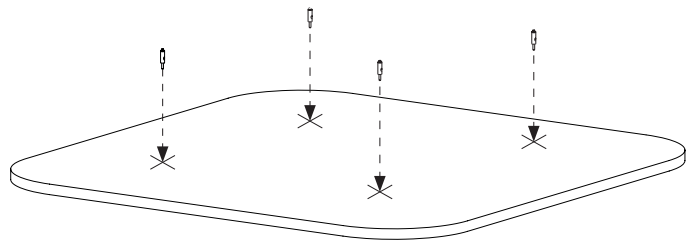

3 Connect cables

Pull suspension cables through Grippers and adjust the cable length.

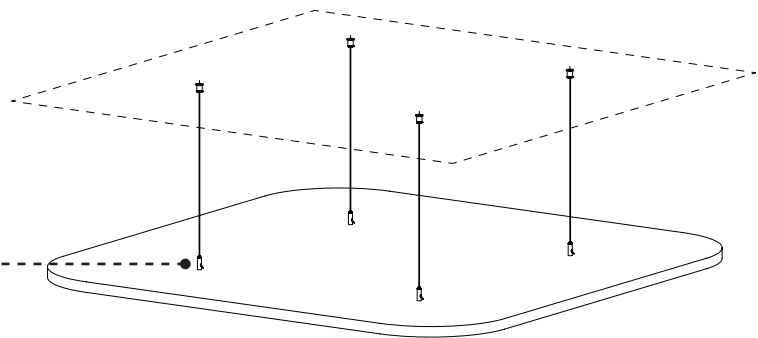

Rectangular Ceiling Panels

Installation Overview

 Extended document available


Applicable article numbers

711.24.15.000.00

711.24.16.000.00


1 Attach mounting hardware

Measure the right spacing according to the X marks on the panel and attach mounting cables to the ceiling.

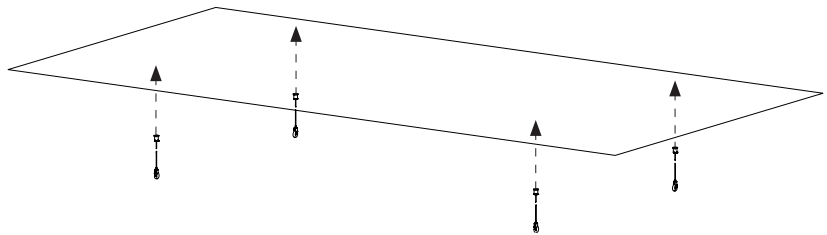



2 Install the steel frame.

Position the frame on the back of the panel and attach it using supplied screws.

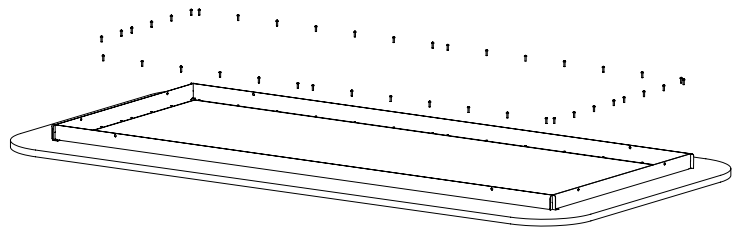

3 Connect cables

Attach clips to stiffening frame on the panel and adjust the cable length.

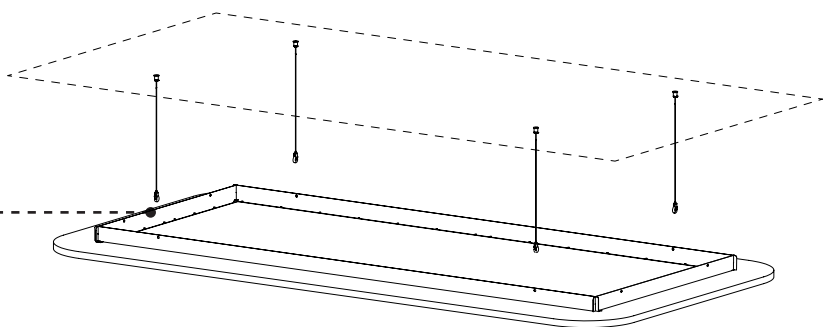

ARCHISONIC®

Colors

 Material brochure available



Name	Snow White	Milk	Cloud	Smoke	Ground	Charcoal	Slate	Raven
Color Code	500	404	103	442	108	542	444	550
NCS Code	S 0300-N	S 0502-Y	S 1002-B	S 3005-R80B	S 5005-Y20R	S 7502-B	S 4500-N	S 8500-N



Name	Nordic Pine	Grove	Moss	Spearmint	Ice Blue	Succulent	Deep Sea	Marine Blue
Color Code	311	317	439	706	304	712	918	864
NCS Code	S 5030-G10Y	S 7020-G30Y	S 2040-G40Y	S 1010-B90G	S 0510-B	S 3020-B30G	S 5020-R90B	S 4050-R70B



Name	Linen	Shell Pink	Jute	Warm Stone	Terracotta	Soft Coral	Honeycomb	Sunshine
Color Code	107	102	920	105	239	516	139	846
NCS Code	S 1505-Y30R	S 0510-R30B	S 3010-Y30R	S 3010-Y50R	S 4040-Y70R	S 2020-Y90R	S 2050-Y20R	S 1040-Y10R



Name	Garnet	Hot Pink	Poster Red	Electric Orange	Winter Sky	Pacific Ocean	Midnight	Grape
Color Code	724	140	662	464	311	432	810	540
NCS Code	S 5040-R10B	S 2060-R20B	S 1080-R	S 0580-Y70R	S 5030-G10Y	S 3040-B	S 7020-R70B	S 5040-R40B

These NCS codes are the closest visual match available and may not be exact to blended fibres.

ARCHISONIC®

Colors

Experience our ARCHISONIC® Felt material with a stunning selection of 32 colors across 8 distinct families, thoughtfully curated by *Colour Hive* in London. Effortlessly combine colors harmoniously to suit your preferences. Discover more in our Materials brochure and order your free sample box today.

Color fastness

Class 6

ISO 105-B02:A1

Order a free sample box



ARCHISONIC® Felt

Material Specification

Product Name	Archisonic® Felt	
Content	100% PET (60% certified post-consumer content)	
Thickness¹	12mm (0.47")	24mm (0.94")
Max. Size	1200x2800mm (47"x110")	1800x2400mm (70"x94")
Acoustic²	ASTM: NRC=0.6 ISO: αw=0.65	ASTM: NRC=0.9 ISO: αw=0.95
Density¹	2400 g/m ² (0.49 lbs/ sqft)	4000 g/m ² (0.82 lbs/sqft)
Color Fastness	Class 6 ISO 105-B02:A1	
Color	32 colors (see Archisonic® Felt Color page for more information)	
Maintenance	For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.	
Lead time³	21 days	
Fire Rating	DIN EN 13501-1: B-s1, d0	ASTM E84 Class A
VOC Emission	28 Days French Regulation A+ ASTM E84 Pass Bream® (International, UK, NL, SE, NOR) Exemplary CDPH (CDPH/EHLB/Standard Method V1.2) Pass	
Certifications	Declare label, Cradle to Cradle, UL Environmental Product Declaration, Member of US Green Building Council, Ecobau 1st Priority, Climmate-KIC, VOC emissions in LEED EQ credit (low-emitting products), SCS Recycled Content	
Durability	Contract	

1 - all values are nominal 2 - measured with 300mm air cavity 3 - depending on the location and type of product



Climate-KIC is supported by the EIT, a body of the European Union



Declare.




Rectangular Ceiling Panels

Acoustic Performance



Testing Standards


ISO 354:2003	Acoustics — Measurement of sound absorption in a reverberation room
ISO 11654:1997	Acoustics — Sound absorbers for use in buildings — Rating of sound absorption
ISO 20189:2018	Acoustics — Screens, furniture and single objects intended for interior use — Rating of sound absorption and sound reduction of elements based on laboratory measurements
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests

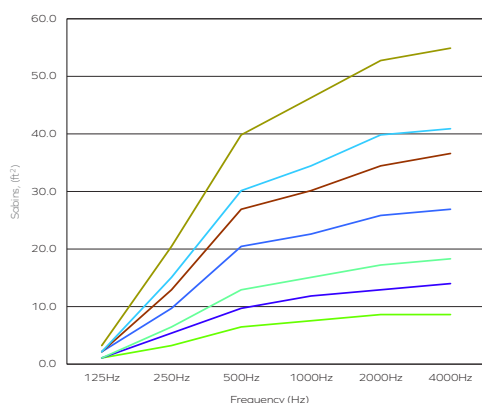

Acoustic Performance - ASTM Sabins, ft²

Frequency (Hz)	125	250	500	1000	2000	4000
24mm Rectangle 1200x600mm	1.08	3.23	6.46	7.53	8.61	8.61
24mm Rectangle 1800x600mm	1.08	5.38	9.69	11.84	12.92	13.99
24mm Rectangle 1800x1200mm	2.15	9.69	20.45	22.60	25.83	26.91
24mm Rectangle 2400x1200mm	2.15	12.92	26.91	30.14	34.44	36.60
24mm Rectangle 2400x1800mm	3.23	20.45	39.83	46.28	52.74	54.90
24mm Square 1200x1200mm	1.08	6.46	12.92	15.07	17.22	18.30
24mm Square 1800x1800mm	2.15	15.07	30.14	34.44	39.83	40.90

The graph represents the Sabins (ft²) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.

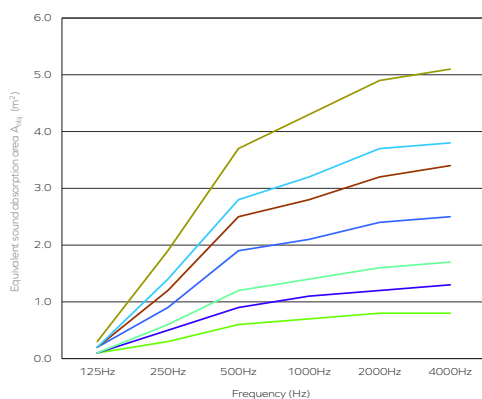

Acoustic Performance - ISO A_{obj}, m²

Frequency (Hz)	125	250	500	1000	2000	4000
24mm Rectangle 1200x600mm	0.1	0.3	0.6	0.7	0.8	0.8
24mm Rectangle 1800x600mm	0.1	0.5	0.9	1.1	1.2	1.3
24mm Rectangle 1800x1200mm	0.2	0.9	1.9	2.1	2.4	2.5
24mm Rectangle 2400x1200mm	0.2	1.2	2.5	2.8	3.2	3.4
24mm Rectangle 2400x1800mm	0.3	1.9	3.7	4.3	4.9	5.1
24mm Square 1200x1200mm	0.1	0.6	1.2	1.4	1.6	1.7
24mm Square 1800x1800mm	0.2	1.4	2.8	3.2	3.7	3.8

The graph represents the equivalent sound absorption per object (A_{obj}) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.

- 24mm Rectangle 1200x600mm
- 24mm Square 1200x1200mm
- 24mm Rectangle 1800x600mm
- 24mm Rectangle 1800x1200mm
- 24mm Square 1800x1800mm
- 24mm Rectangle 2400x1200mm
- 24mm Rectangle 2400x1800mm

Acoustic Test Results


	α_w	SAA	NRC
24mm Ceiling Panel 1800x2400mm ¹	0.75 (MH)	0.85	0.85
12mm Ceiling Panel 1200x2800mm ¹	0.65 (H)	0.74	0.75
24mm Ceiling Panel 1800x2400mm ²	0.55 (MH)	0.72	0.70

1 - Measured with 200mm airgap and open edges

2 - Measured with 200mm airgap, open edges and 18% perforation

Ceiling Panels

Reference Projects

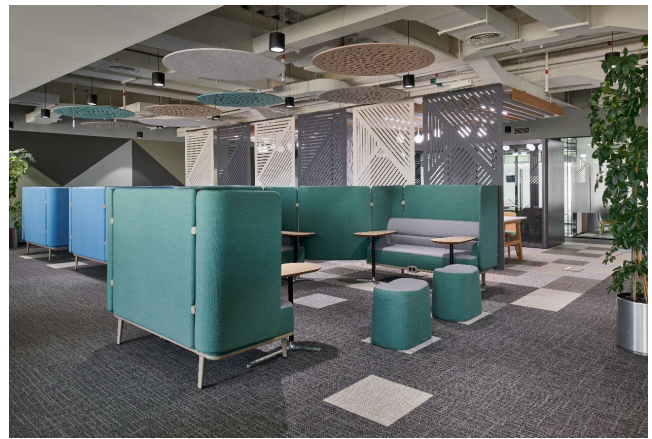

Rectangular Ceiling Panels

Additional Information

Online Resources

A variety of resources are available online for all of our products. Please visit the product's page for more information.



CAD files



Spec sheets and
Installation Guide



Color families



Instruction
videos



Associated
products specs.

Ordering Process

Our experienced team of Project Consultants will guide and support you throughout the order process. We fulfill the majority of our orders in as little as 21 days¹ from your first point of contact, allowing you to focus on what truly matters to you.



Contact our
consultant

Quote¹

48h



Order Confirmation

Production¹

14-21 days



Dispatch

Transit

location based



Delivery

Contact Us

Ready to make an impact? We are just an email or call away to discuss your project and answer any question.




+41 41 566 55 55



connect@impactacoustic.com



Online form

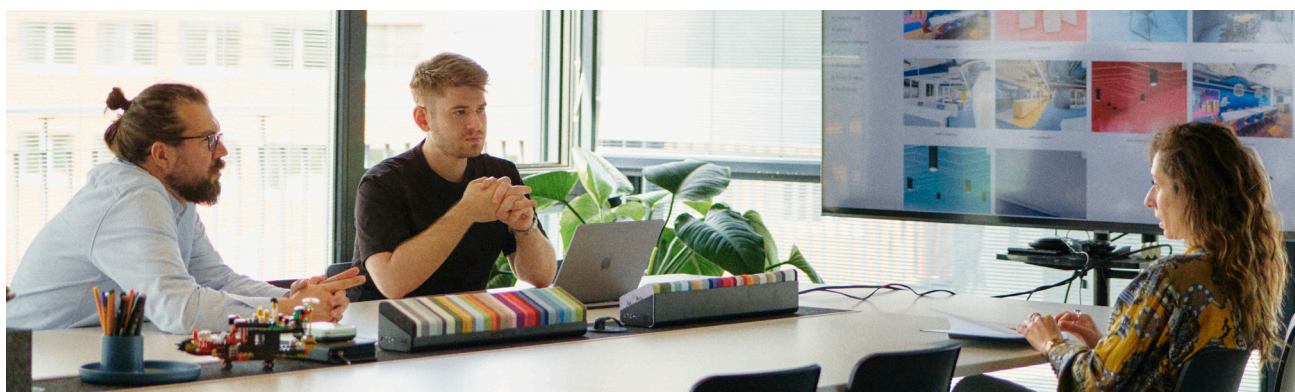

¹ - Quote and Production times may vary.

IMPACT ACOUSTIC®
Ceiling Panels Rect. rev.01 - 17.01.24

(Switzerland)
(USA)
(Philippines)

connect@impactacoustic.com
usa@impactacoustic.com
philippines@impactacoustic.com

(+41) 41 566 55 55
(+1) 646 918 1581
(+63) 285 80 02 50

#WeMakeAnImpact

**#We
Make An
Impact**

connect@impactacoustic.com | www.impactacoustic.com