

IMPACT ACOUSTIC®



Contour


Wall Covering

732.12.20.000.00

732.24.20.000.00

Contour

General Information

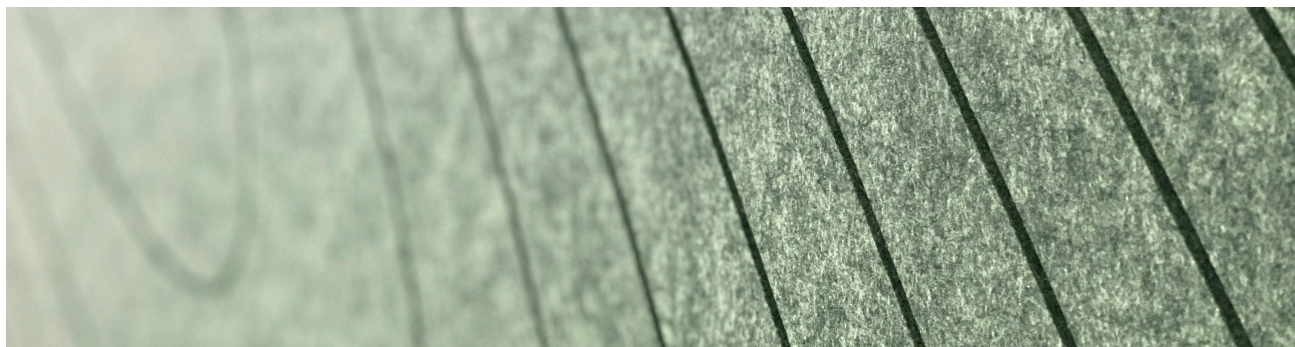


Data

Applicable article numbers


732.24.20.000.00
732.12.20.000.00

Total Dimensions³	24mm / 12 mm	0.9" / 0.5"
Height	2400mm / 2800mm	95" / 110"
Weight	1800mm / 1200mm	71" / 47"



Material

Wall Covering 100% PET (60% post-consumer) in 32 colors
Glue Spray Glue



Weight¹

24mm / 0.95"	4 kg/m ²	0.82 lbs/sq.ft
12mm / 0.47"	2.4 kg/m ²	0.49 lbs/sq.ft

Included

PET Panels

Spray glue

Installation
guide

Warranty
2 years²



1 - all weights are nominal

2 - Impact Acoustic warranty terms apply


3 - all dimensions are nominal

Contour


Specification Guide

Ensure you make the perfect choice by choosing our solutions for your next project. To get started, simply define some basic information and constraints about your space. Then explore our range of standard solutions or contact us directly for a more in-depth discussion of personalised customized options.

1 Prepare this information:



Project Area




Plans




Other Considerations

2 Specify your Wall Covering:




Material thickness

page 4-5



Quantity



Color

page 8

3 Article numbers:

732	Material Thickness ³	20	Colour	00
732	24mm	20	Choose colour as shown on p. 8	00
	12mm			

Example: 732.24.20.662.00

Wall Covering - Contour, 2400 x 1800 x 24mm, 662 - Poster Red incl. spray glue

Contour

Geometry Information

Applicable articles numbers

732.24.20.000.00



Scope of delivery

For each item you will receive a set of 1x PET panels (in the dimensions below), 1x spray adhesive can per set.

Applicable articles numbers

These panels are mounted with a contact spray adhesive. Instructions are available online.

Contour 24mm

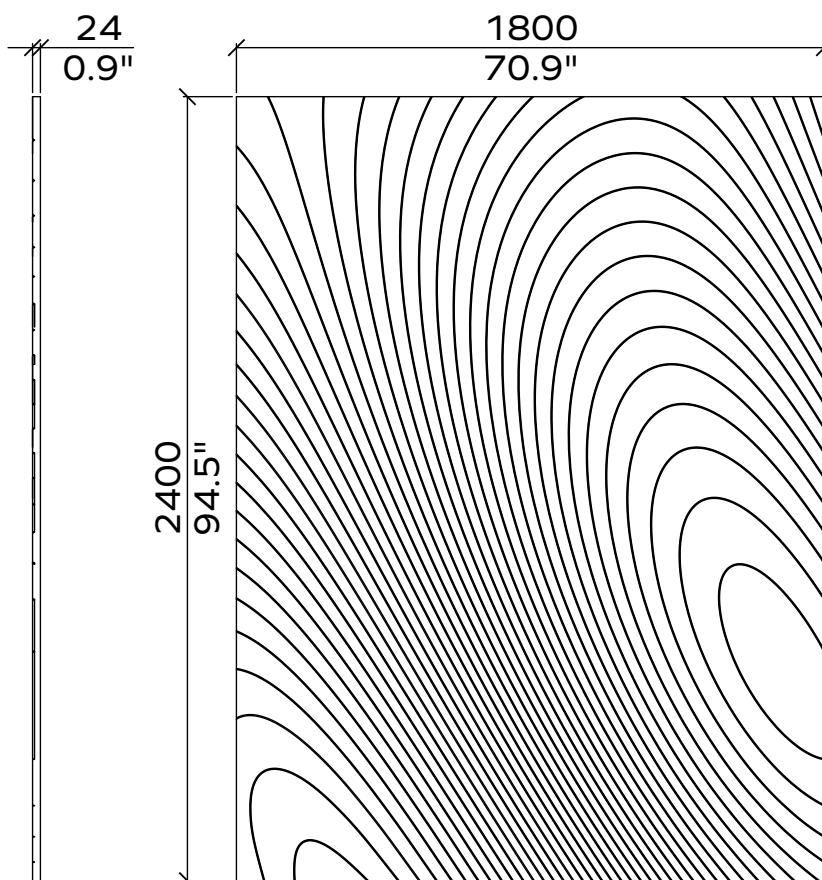

All dimensions are nominal

Contour

Geometry Information

Applicable articles numbers

732.12.20.000.00



Scope of delivery

For each item you will receive a set of 1x PET panels (in the dimensions below), 1x spray adhesive can per set.

Applicable articles numbers

These panels are mounted with a contact spray adhesive. Instructions are available online.




Contour 12mm

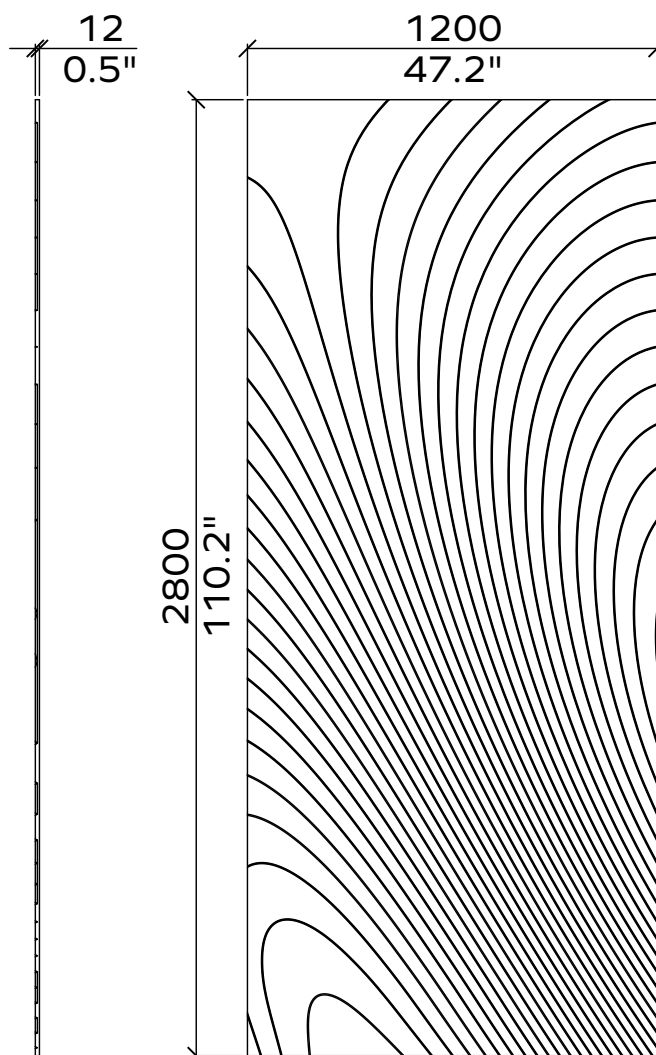

All dimensions are nominal




Contour

More available perforations in 24mm

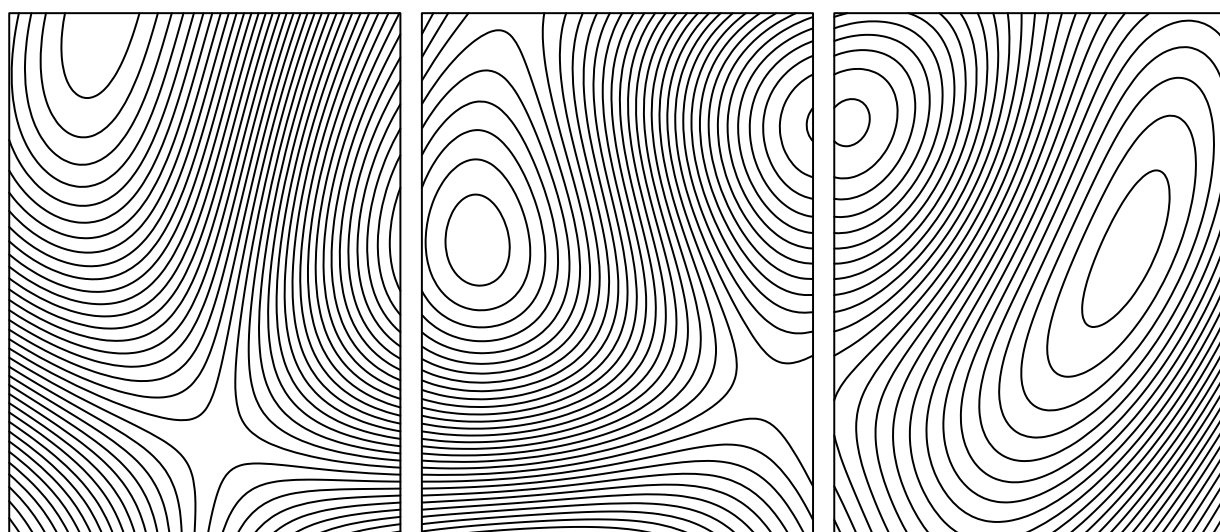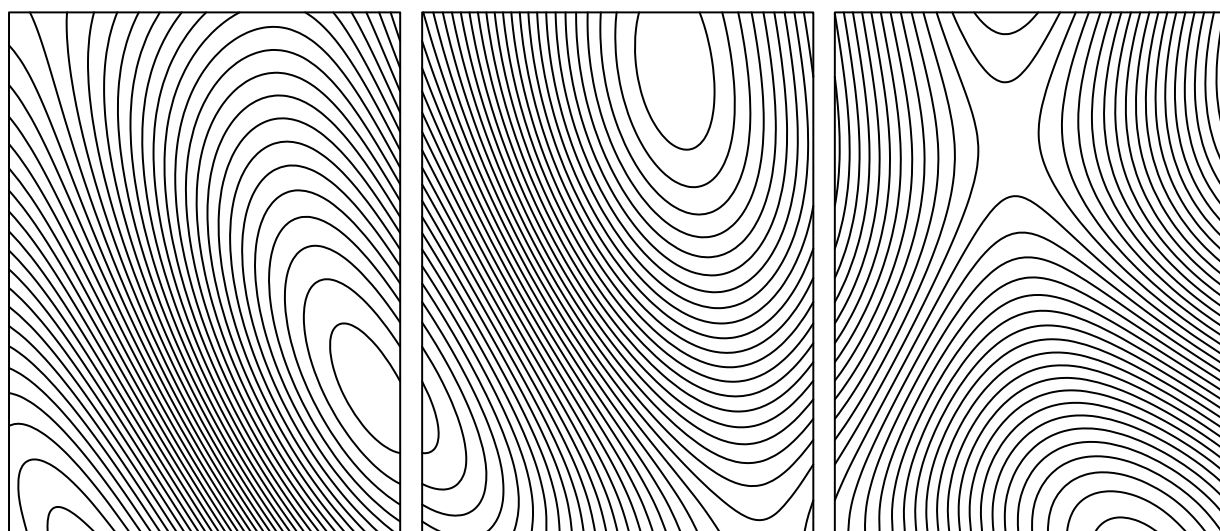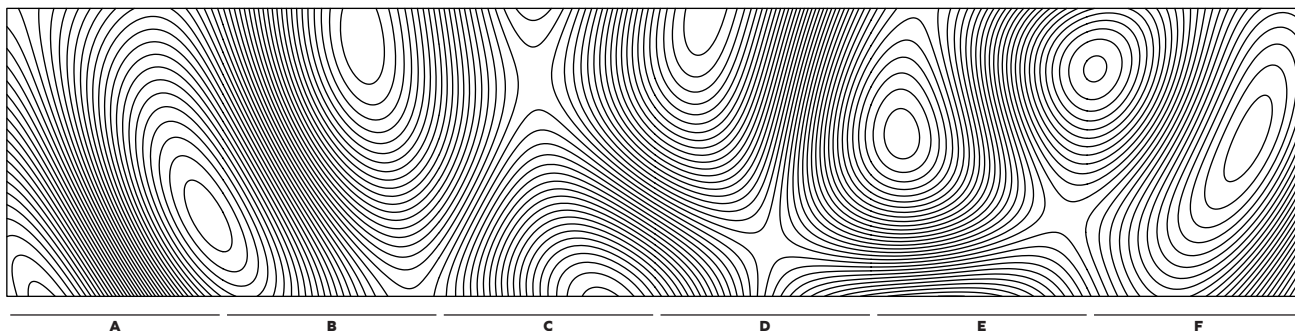

Contour



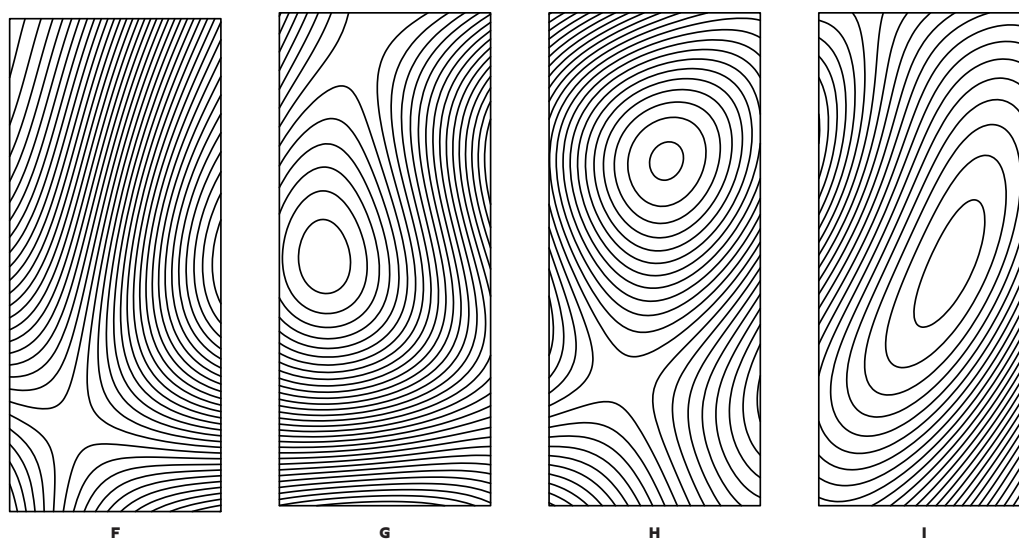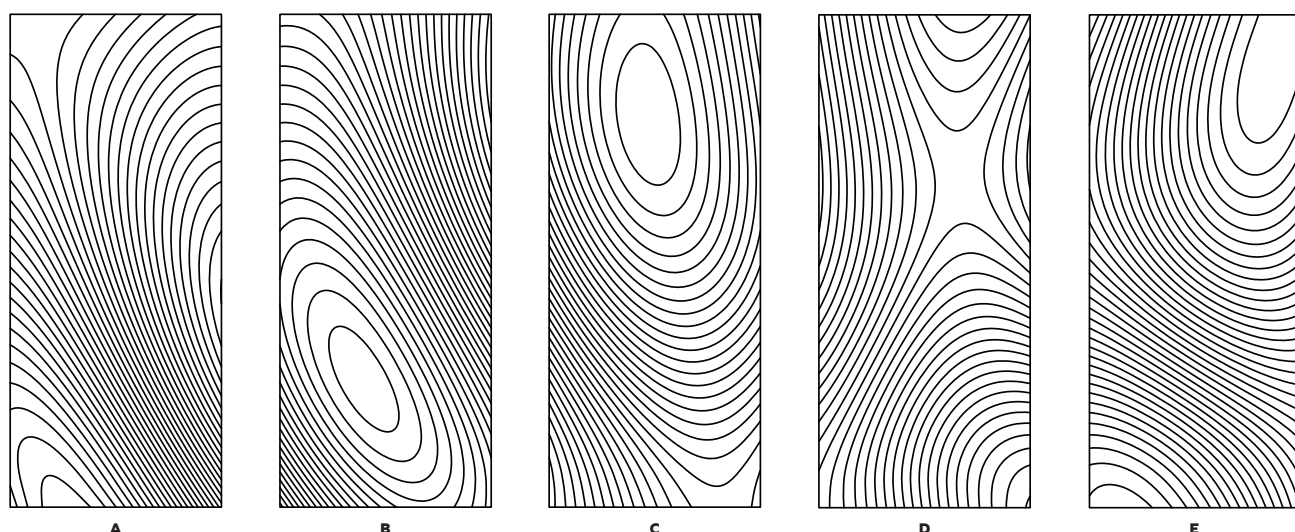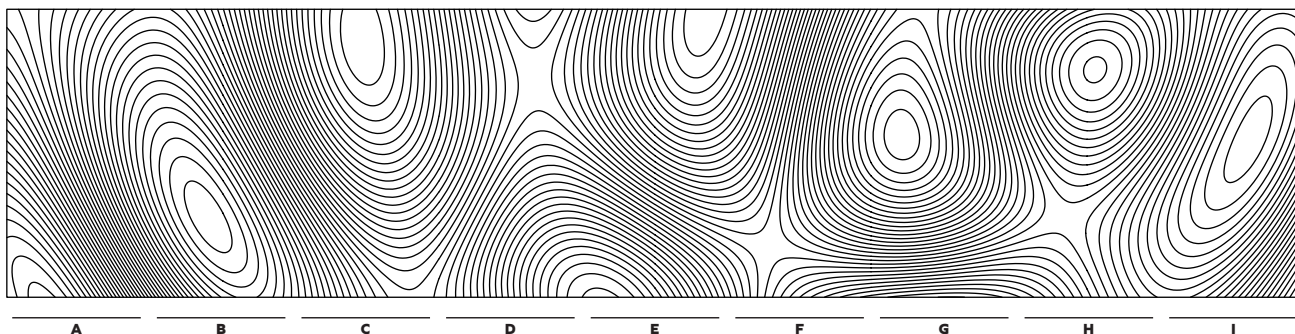





More available perforations in 12mm











ARCHISONIC®









Colors

 Material brochure available

								
Name	Snow White	Milk	Cloud	Smoke	Ground	Charcoal	Slate	Raven
Color Code	500	404	103	442	108	542	444	550
NCS Code	S 0300-N	S 0502-Y	S 1002-B	S 3005-R80B	S 5005-Y20R	S 7502-B	S 4500-N	S 8500-N

								
Name	Nordic Pine	Grove	Moss	Spearmint	Ice Blue	Succulent	Deep Sea	Marine Blue
Color Code	311	317	439	706	304	712	918	864
NCS Code	S 5030-G10Y	S 7020-G30Y	S 2040-G40Y	S 1010-B90G	S 0510-B	S 3020-B30G	S 5020-R90B	S 4050-R70B

								
Name	Linen	Shell Pink	Jute	Warm Stone	Terracotta	Soft Coral	Honeycomb	Sunshine
Color Code	107	102	920	105	239	516	139	846
NCS Code	S 1505-Y30R	S 0510-R30B	S 3010-Y30R	S 3010-Y50R	S 4040-Y70R	S 2020-Y90R	S 2050-Y20R	S 1040-Y10R

								
Name	Garnet	Hot Pink	Poster Red	Electric Orange	Winter Sky	Pacific Ocean	Midnight	Grape
Color Code	724	140	662	464	410	432	810	540
NCS Code	S 5040-R10B	S 2060-R20B	S 1080-R	S 0580-Y70R	S 2020-R90 B	S 3040-B	S 7020-R70B	S 5040-R40B

These NCS codes are the closest visual match available and may not be exact to blended fibres.

ARCHISONIC®

Colors

Experience our ARCHISONIC® Felt material with a stunning selection of 32 colors across 8 distinct families, thoughtfully curated by *Colour Hive* in London. Effortlessly combine colors harmoniously to suit your preferences. Discover more in our Materials brochure and order your free sample box today.

Color fastness

Class 6

ISO 105-B02:A1

Order a free sample box



ARCHISONIC® Felt

Material Specification

Product Name	Archisonic® Felt	
Content	100% PET (60% certified post-consumer content)	
Thickness¹	12mm (0.47")	24mm (0.94")
Max. Size	1200x2800mm (47"x110")	1800x2400mm (70"x94")
Acoustic²	ASTM: NRC=0.6 ISO: α_w =0.65	ASTM: NRC=0.9 ISO: α_w =0.95
Density¹	2400 g/m ² (0.49 lbs/ sqft)	4000 g/m ² (0.82 lbs/sqft)
Color Fastness	Class 6 ISO 105-B02:A1	
Color	32 colors (see Archisonic® Felt Color page for more information)	
Maintenance	For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.	
Lead time³	21 days	
Fire Rating	DIN EN 13501-1: B-s1, d0	ASTM E84 Class A
VOC Emission	28 Days French Regulation A+ ASTM E84 Pass Bream® (International, UK, NL, SE, NOR) Exemplary CDPH (CDPH/EHLB/Standard Method V1.2) Pass	
Certifications	Declare label, Cradle to Cradle, UL Environmental Product Declaration, Member of US Green Building Council, Ecobau 1st Priority, Climmate-KIC, VOC emissions in LEED EQ credit (low-emitting products), SCS Recycled Content	
Durability	Contract	

1 - all values are nominal 2 - measured with 300mm air cavity 3 - depending on the location and type of product



Climate-KIC is supported by the EIT, a body of the European Union



Declare.

DANAK
TEST Reg.nr. 522



Contour

Acoustic Performance



Testing Standards


ISO 354:2003	Acoustics — Measurement of sound absorption in a reverberation room
ISO 11654:1997	Acoustics — Sound absorbers for use in buildings — Rating of sound absorption
ISO 20189:2018	Acoustics — Screens, furniture and single objects intended for interior use — Rating of sound absorption and sound reduction of elements based on laboratory measurements
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests

Acoustic Test Results

	α_w	SAA	NRC
Archisonic 12mm (no air gap)	0.3 (MH)	0.42	0.45
Archisonic 12mm (50mm air gap)	0.4 (MH)	0.50	0.65
Archisonic 12mm (50mm insulation)	1.00	1.00	0.95
Archisonic 24mm (no air gap)	0.55 (MH)	0.70	0.70
Archisonic 24mm (50mm air gap)	0.65 (MH)	0.78	0.80
Archisonic 24mm (50mm insulation)	1.00	1.00	1.00

Acoustic Performance

Frequency (Hz)		125	250	500	1000	2000	4000
Archisonic 12mm (no air gap)	α_s	0.04	0.07	0.23	0.53	0.84	1.03
Archisonic 12mm (50mm air gap)	α_s	0.04	0.14	0.40	0.71	0.78	0.76
Archisonic 12mm (50mm insulation)	α_s	0.35	0.83	1.09	1.15	1.11	1.06
Archisonic 24mm (no air gap)	α_s	0.07	0.24	0.55	0.92	1.07	1.11
Archisonic 24mm (50mm air gap)	α_s	0.14	0.37	0.76	0.99	0.99	1.04
Archisonic 24mm (50mm insulation)	α_s	0.39	0.89	1.09	1.14	1.13	1.08

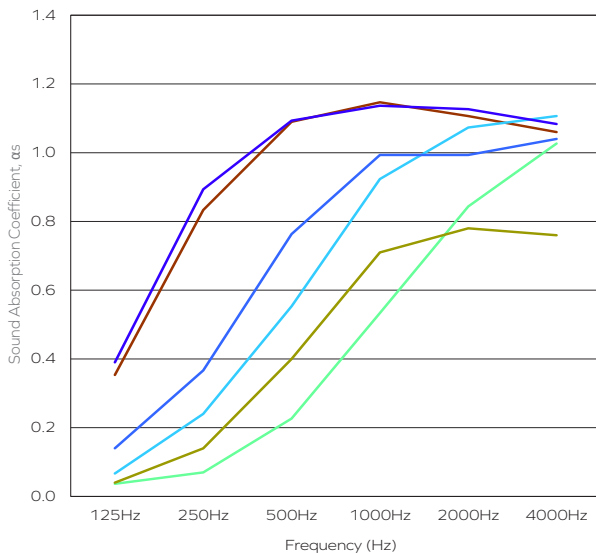

- Archisonic 12mm (no air gap)
- Archisonic 12mm (50mm air gap)
- Archisonic 12mm (50mm insulation)
- Archisonic 24mm (no air gap)
- Archisonic 24mm (50mm air gap)
- Archisonic 24mm (50mm insulation)

The graph represents the sound absorption coefficients (α_s) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.

Wall Covering

Reference Projects



Contour

Additional Information

Online Resources

A variety of resources are available online for all of our products. Please visit the product's page for more information.



CAD files



Spec sheets and
Installation Guide



Color families



Instruction
videos



Associated
products specs.

Ordering Process

Our experienced team of Project Consultants will guide and support you throughout the order process. We fulfill the majority of our orders in as little as 21 days¹ from your first point of contact, allowing you to focus on what truly matters to you.



Contact our
consultant

Quote¹

1-2 day



Order Confirmation

Production¹

2-3 weeks



Dispatch

Transit

location-dependent



Delivery

Contact Us

Ready to make an impact? We are just an email or call away to discuss your project and answer any question.




+41 41 566 55 55



connect@impactacoustic.com



Online form

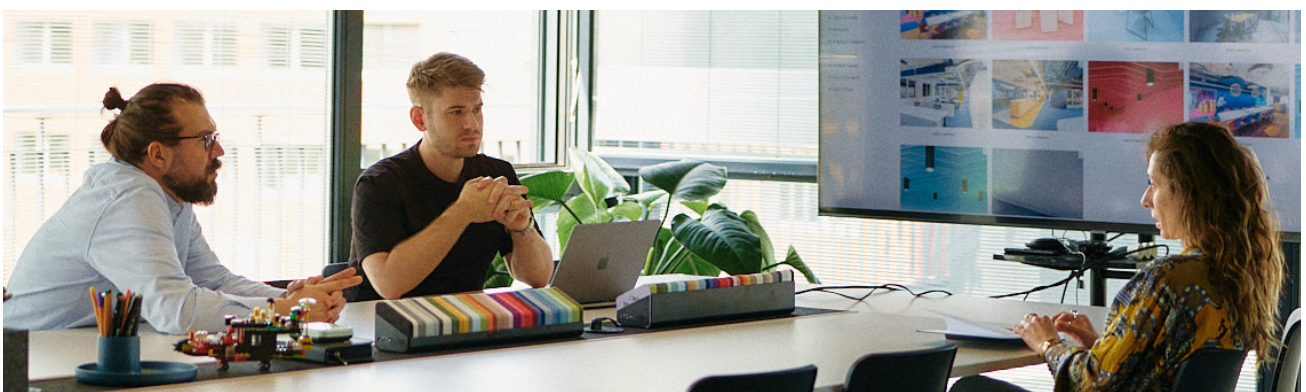

¹ - Quote and Production times may vary.

IMPACT ACOUSTIC®
Contour Wall Covering rev.01-13.02.24

(Switzerland)
(USA)
(Philippines)

connect@impactacoustic.com
usa@impactacoustic.com
philippines@impactacoustic.com

(+41) 41 566 55 55
(+1) 646 918 1581
(+63) 285 80 02 50

#WeMakeAnImpact

**#We
Make An
Impact**

connect@impactacoustic.com | www.impactacoustic.com