


Web, Bubble, Forest, Jungle

Round Ceiling Panels

711.24.17.000.10	711.24.17.000.12
711.24.18.000.10	711.24.18.000.12
711.24.20.000.00	711.24.24.000.00
711.24.21.000.00	711.24.25.000.00

Web, Bubble, Forest and Jungle

General Information

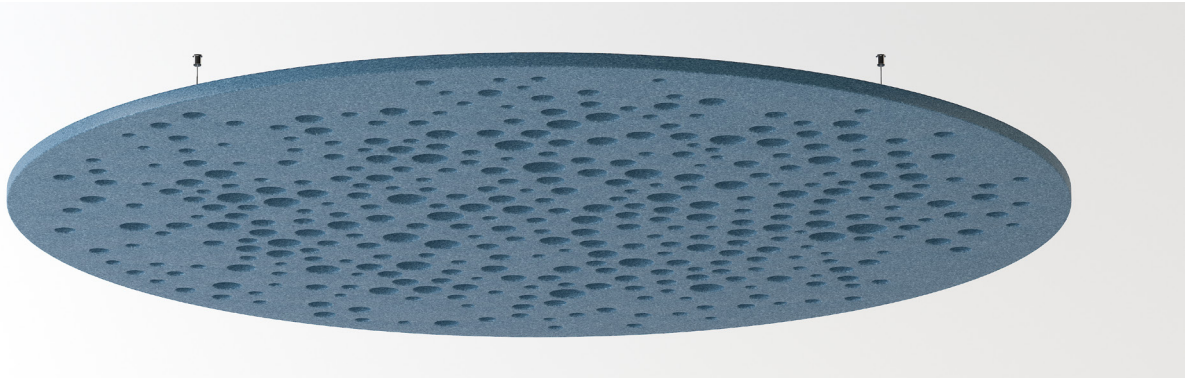


Data

Applicable article numbers

711.24.17.000.10	711.24.17.000.12	711.24.21.000.00	711.24.24.000.00
711.24.18.000.10	711.24.18.000.12	711.24.21.000.00	711.24.25.000.00


Dimensions¹

Diameter	1200 or 1800mm	47.24" or 70.87"
Material thickness	24mm	0.94"



Material

Panel 100% PET (60% post-consumer) in 32 colors.



Weight²

24mm PET Material	4kg/m ² kg (±10%)	0.82 lbs/ft ² (±10%)
-------------------	------------------------------	---------------------------------

(for specific product weight please refer to Geometry Information pages 5-10)

Included

Ceiling Panel



Installation Kit



Installation guide



Warranty
2 years³




1 - all dimensions are nominal 2 - all weight values are nominal 3 - Impact Acoustic warranty terms apply

Web, Bubble, Forest and Jungle


Specification Guide

Ensure you make the perfect choice by choosing our solutions for your next project. To get started, simply define some basic information and constraints about your space. Then explore our range of standard solutions or contact us directly for a more in-depth discussion of personalised customized options.

1 Prepare this information:




Ceiling Plans (RCP)




Ceiling Type

2 Specify your Baffles:




Size

page 5 and 6




Number of Modules

page 4



Color


page 8



Pattern

page 8

3 Verify installation method:



Direct gripper


page 7

Web, Bubble, Forest and Jungle

Product Family Overview


3 Ceiling Panels Round Perforated

711.24.17.000.12 - Ceiling Panel Round Bubbles

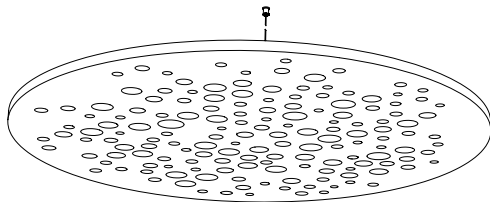


(D1200 x 24mm)
(D47.24" x 0.94")

711.24.18.000.12 - Ceiling Panel Round Bubbles

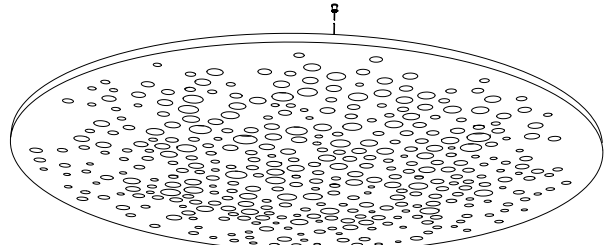


(D1800 x 24mm)
(D70.87" x 0.94")

711.24.17.000.10 - Ceiling Panel Round Web

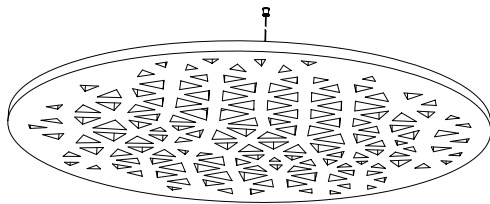


(D1200 x 24mm)
(D47.24" x 0.94")

711.24.18.000.10 - Ceiling Panel Round Web

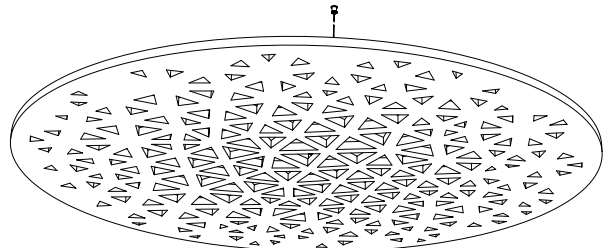


(D1800 x 24mm)
(D70.87" x 0.94")

711.24.20.000.00 - Ceiling Panel Round Forest

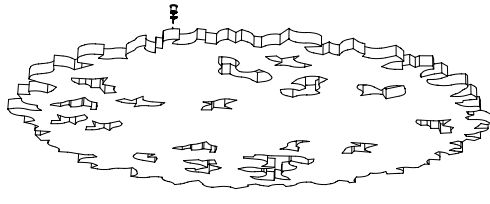


(D1200 x 24mm)
(D47.24" x 0.94")

711.24.21.000.00 - Ceiling Panel Round Forest

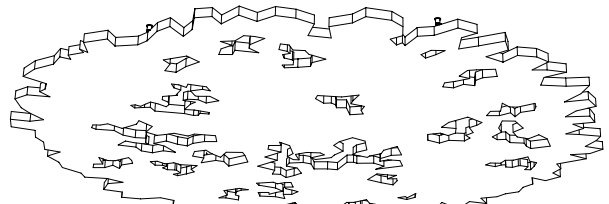


(D1800 x 24mm)
(D70.87" x 0.94")

711.24.24.000.00 - Ceiling Panel Round Jungle

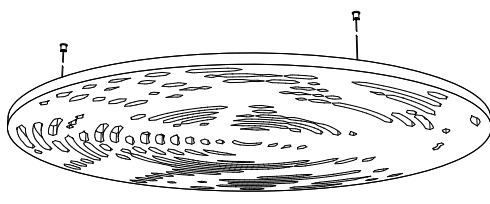

(D1200 x 24mm)
(D47.24" x 0.94")


711.24.25.000.00 - Ceiling Panel Round Jungle

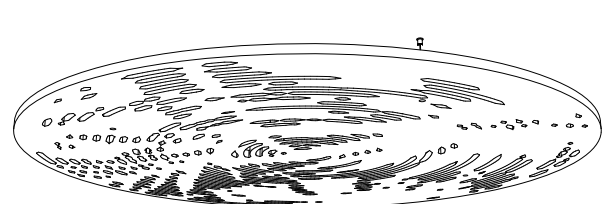

(D1800 x 24mm)
(D70.87" x 0.94")

Geometry Information

Ceiling Panel Round 711.24.17.000.10

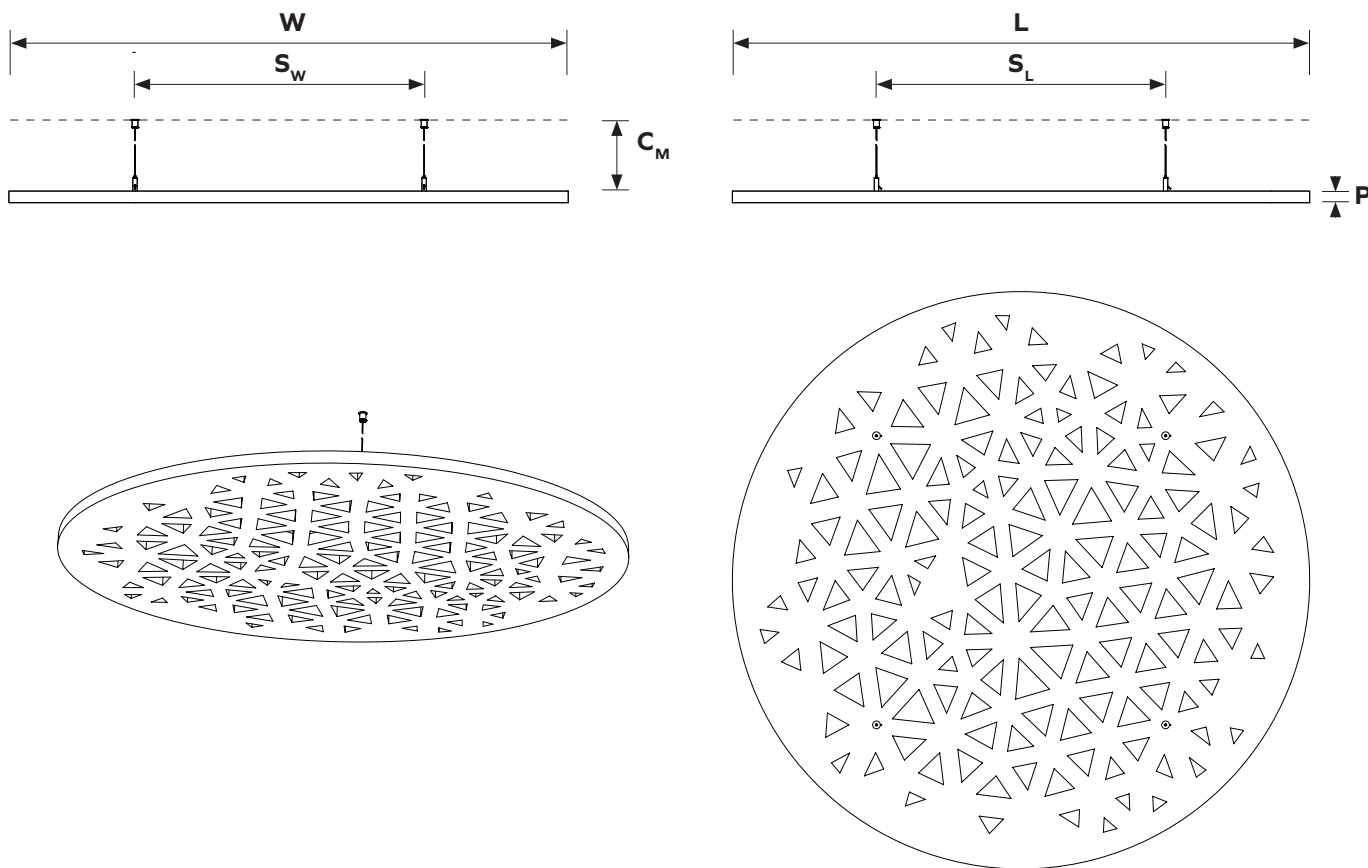

Dimensions table ¹

W	Total width	1195mm	47.05"
L	Total length	1195mm	47.05"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	595mm	23.43"
S_L	Support spacing L	595mm	23.43"
P	PET material thickness	24mm	0.94"


Weight table ²

PET panel	3.68 kg	8.11 lbs
-----------	---------	----------

1 - all dimensions are nominal 2 - all weight values are nominal

Geometry Information

Ceiling Panel Round 711.24.18.000.10

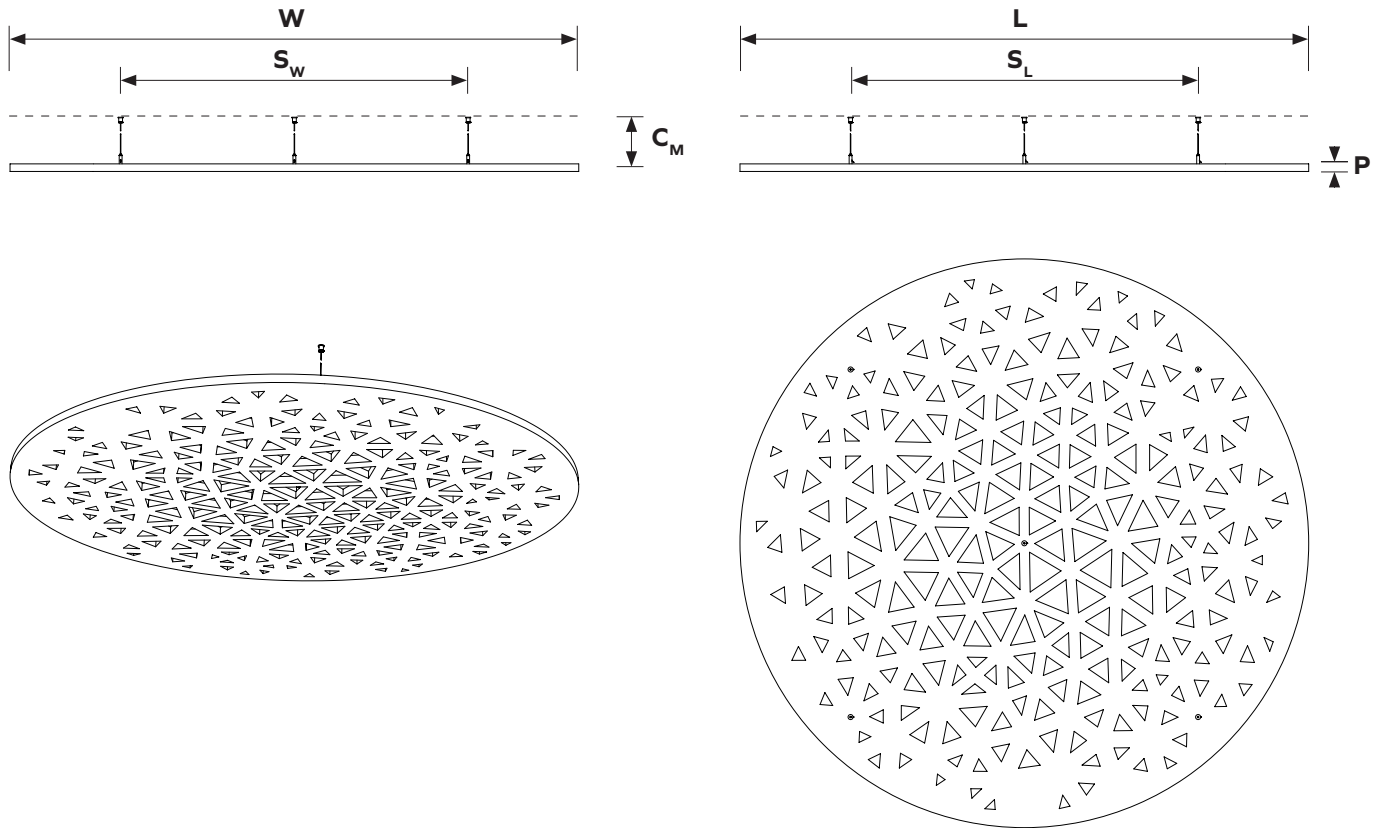

Dimensions table ¹

W	Total width	1800mm	70.87"
L	Total length	1800mm	70.87"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	1100mm	23.43"
S_L	Support spacing L	1100mm	23.43"
P	PET material thickness	24mm	0.94"

Weight table ²

PET panel	8.43 kg	18.58 lbs
-----------	---------	-----------


1 - all dimensions are nominal 2 - all weight values are nominal

Bubble

Custom solutions available

Geometry Information

Ceiling Panel Round 711.24.17.000.12

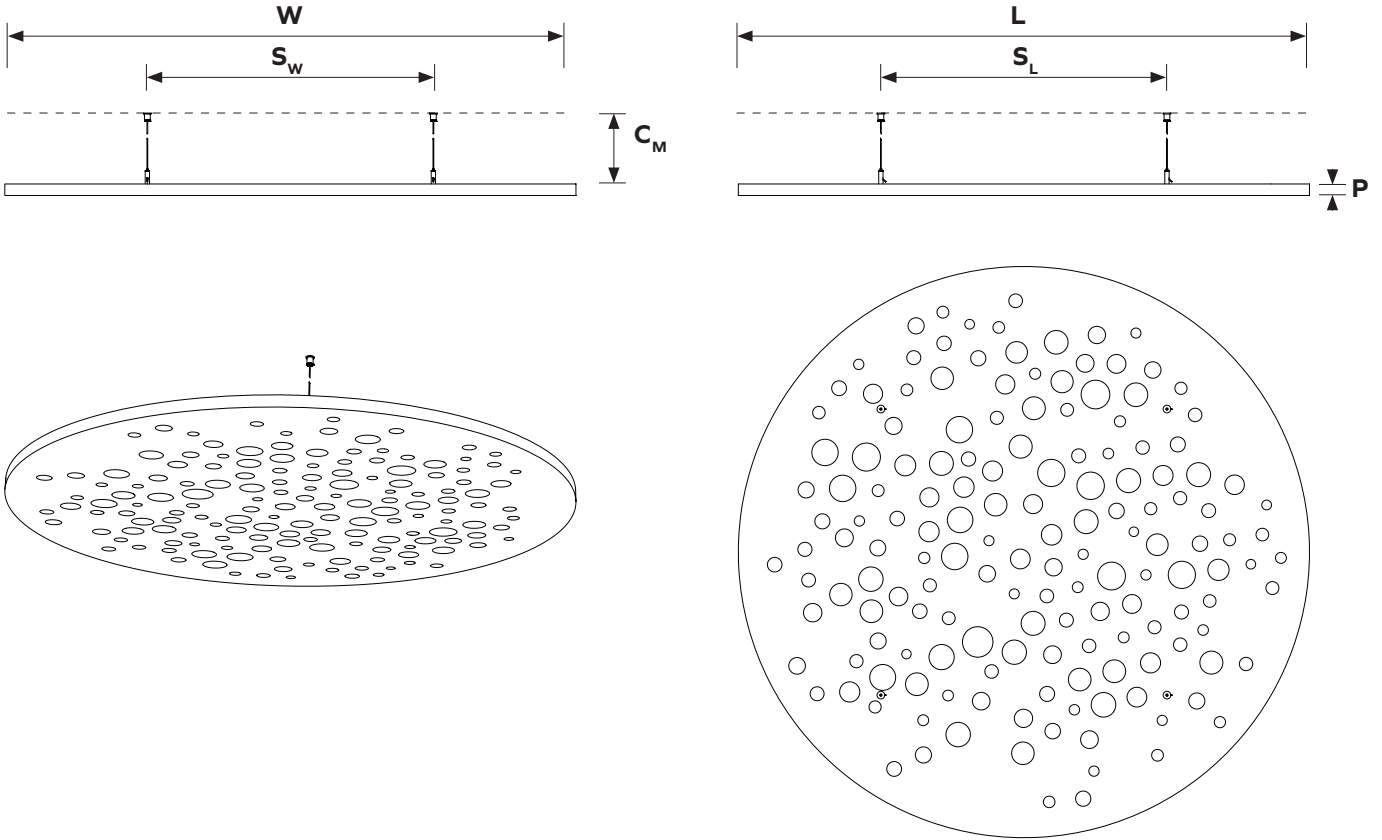

Dimensions table ¹

W	Total width	1195mm	47.05"
L	Total length	1195mm	47.05"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	595mm	23.43"
S_L	Support spacing L	595mm	23.43"
P	PET material thickness	24mm	0.94"

Weight table ²

PET panel	3.77 kg	8.31 lbs
-----------	---------	----------


1 - all dimensions are nominal 2 - all weight values are nominal

Bubble

Custom solutions available

Geometry Information

Ceiling Panel Round 711.24.18.000.12

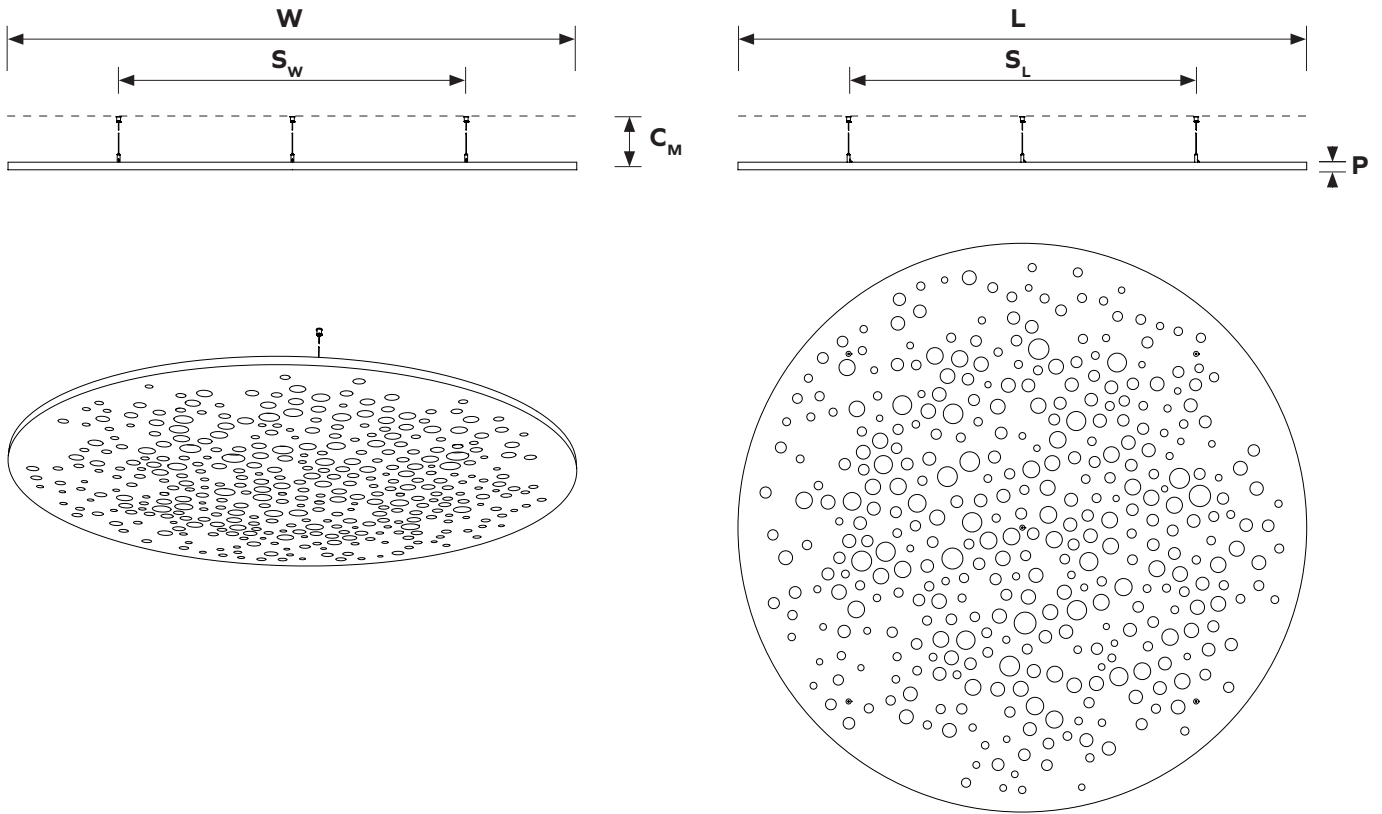

Dimensions table ¹

W	Total width	1800mm	70.87"
L	Total length	1800mm	70.87"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	1100mm	23.43"
S_L	Support spacing L	1100mm	23.43"
P	PET material thickness	24mm	0.94"

Weight table ²

PET panel	8.50 kg	18.74 lbs
-----------	---------	-----------


1 - all dimensions are nominal 2 - all weight values are nominal

Forest

Custom solutions available

Geometry Information

Ceiling Panel Round 711.24.20.000.00

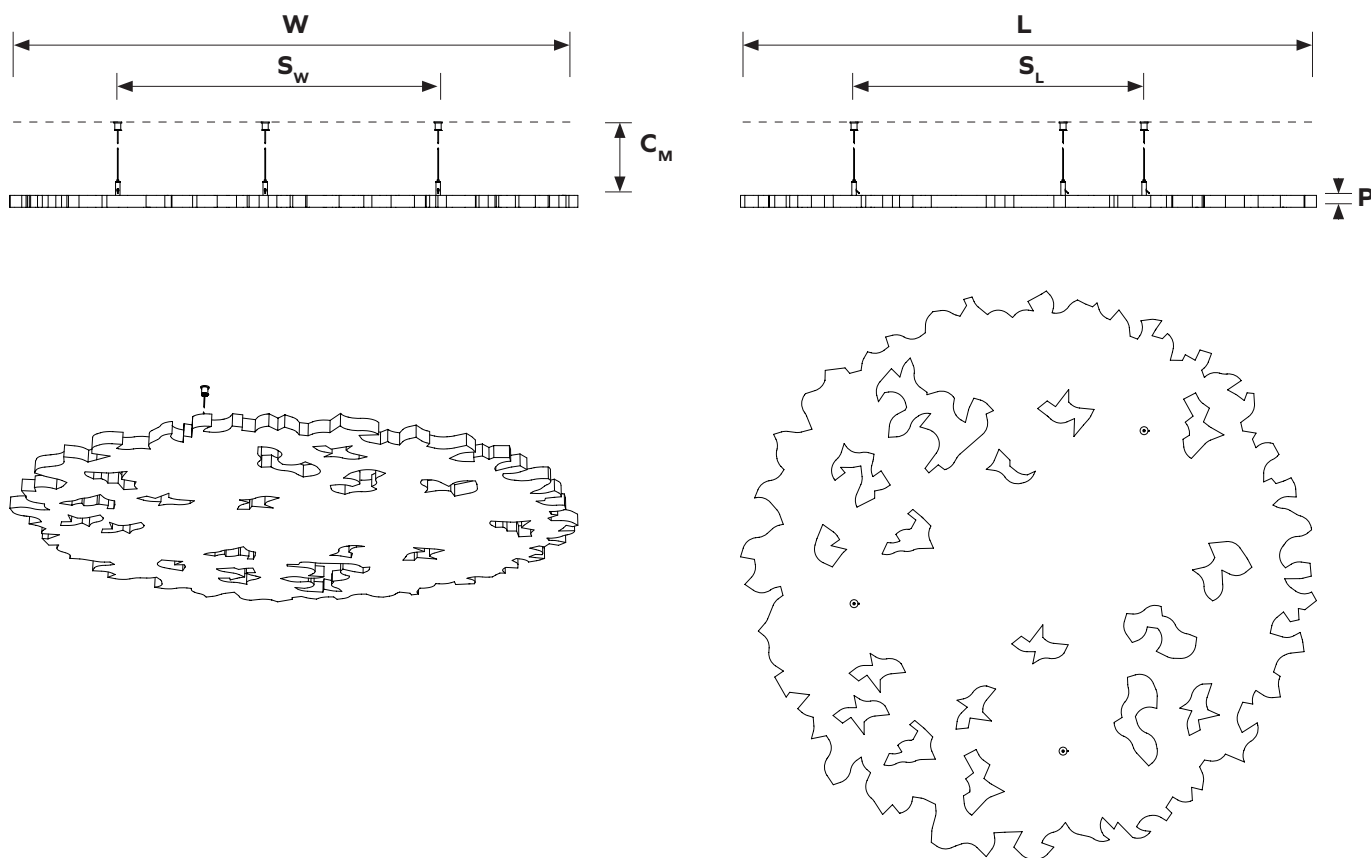

Dimensions table ¹

W	Total width	1145mm	45.08"
L	Total length	1160mm	45.67"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	680mm	26.77"
S_L	Support spacing L	515mm	20.28"
P	PET material thickness	24mm	0.94"

Weight table ²

PET panel	3.35 kg	7.39 lbs
-----------	---------	----------




1 - all dimensions are nominal 2 - all weight values are nominal

Forest

Geometry Information

Custom solutions available

Ceiling Panel Round 711.24.21.000.00

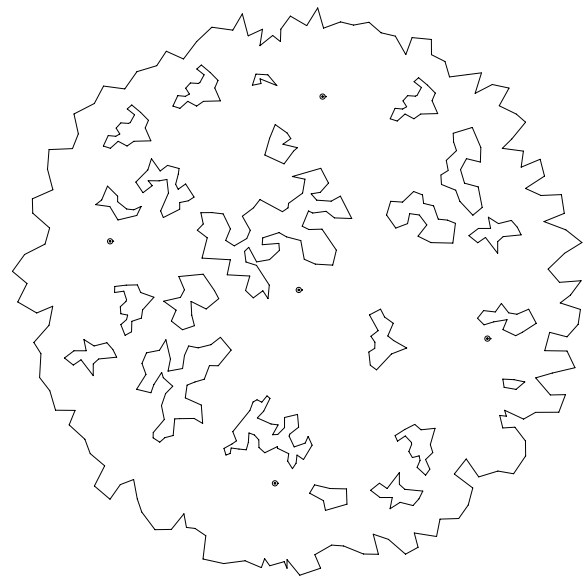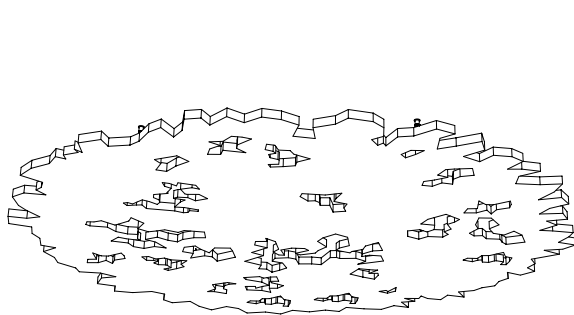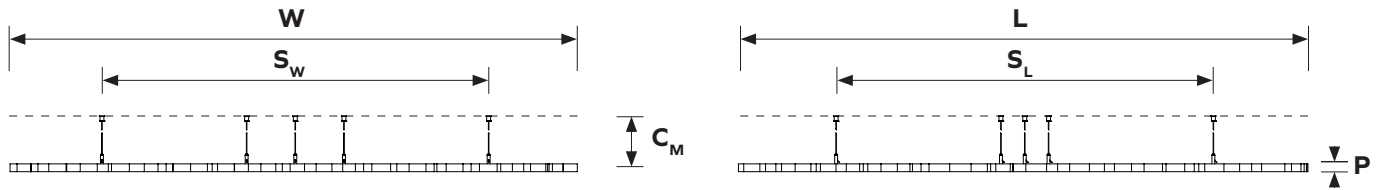

Dimensions table ¹



W	Total width	1743mm	68.62"
L	Total length	1750mm	68.90"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	1197mm	47.13"
S_L	Support spacing L	1197mm	47.13"
P	PET material thickness	24mm	0.94"

Weight table ²

PET panel	7.56 kg	16.67 lbs
-----------	---------	-----------

1 - all dimensions are nominal 2 - all weight values are nominal

Ceiling Panel Round 711.24.24.000.00

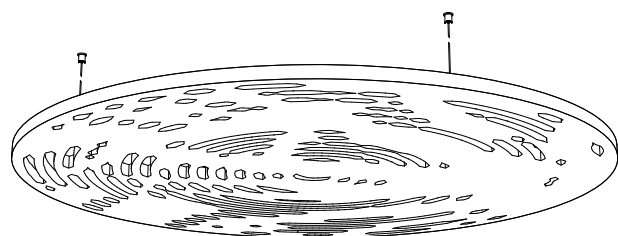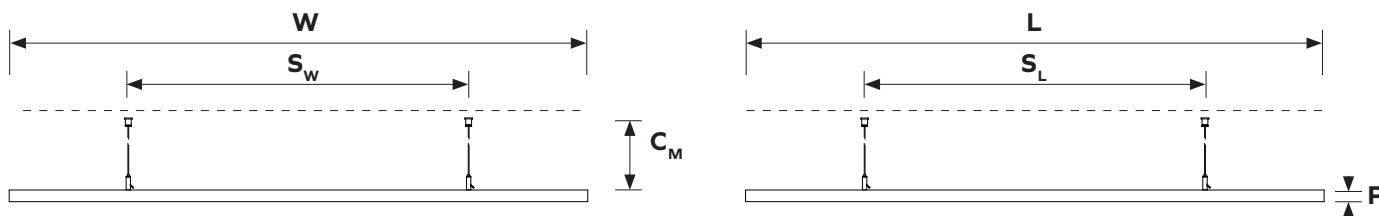

Dimensions table ¹

W	Total width	1195mm	47.05"
L	Total length	1195mm	47.05"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	700 mm	27.56"
S_L	Support spacing L	700 mm	27.56"
P	PET material thickness	24mm	0.94"




Weight table ²

PET panel	3.68 kg	8.11 lbs
-----------	---------	----------

1 - all dimensions are nominal 2 - all weight values are nominal

Geometry Information

Ceiling Panel Round 711.24.25.000.00

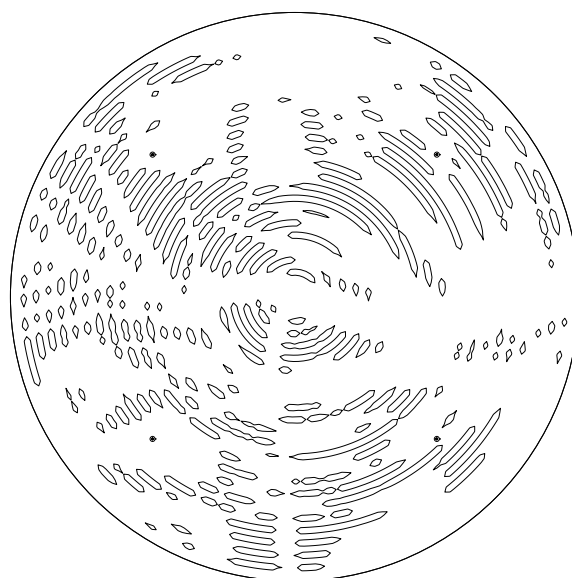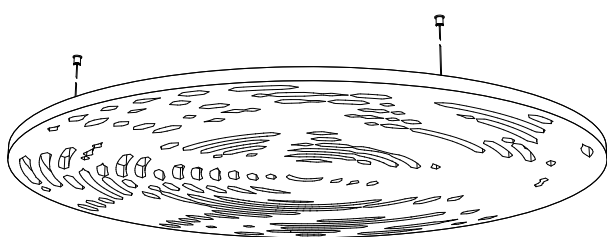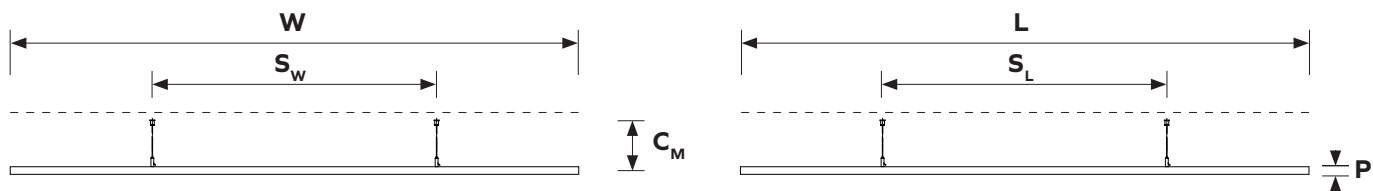

Dimensions table ¹

W	Total width	1800mm	70.87"
L	Total length	1800mm	70.87"
C_M	Distance from ceiling	min. 100mm	min. 4"
S_w	Support spacing W	900 mm	35.43"
S_L	Support spacing L	900 mm	35.43"
P	PET material thickness	24mm	0.94"

Weight table ²

PET panel	8.43 kg	18.58 lbs
-----------	---------	-----------

1 - all dimensions are nominal 2 - all weight values are nominal


Web, Bubble, Forest and Jungle

Installation Overview

 Extended document available


1 Attach mounting hardware

Measure the right spacing according to the X marks on the panel and attach mounting cables to the ceiling.

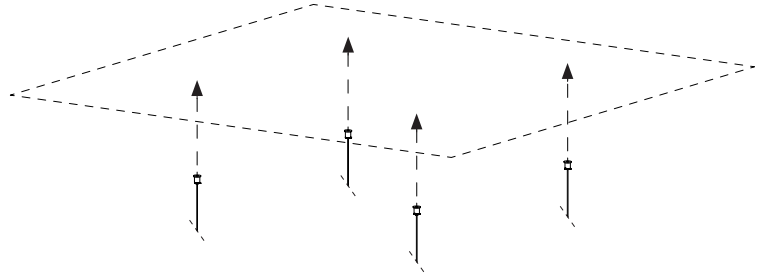



2 Attach grippers to the panel

Screw the cable grippers into the panel at the locations indicated by X mark on the panel back surface.

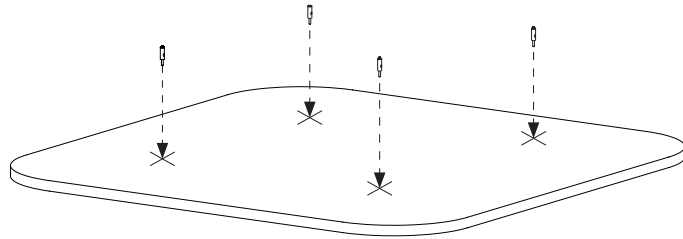

3 Connect cables

Pull suspension cables through Grippers and adjust the cable length.

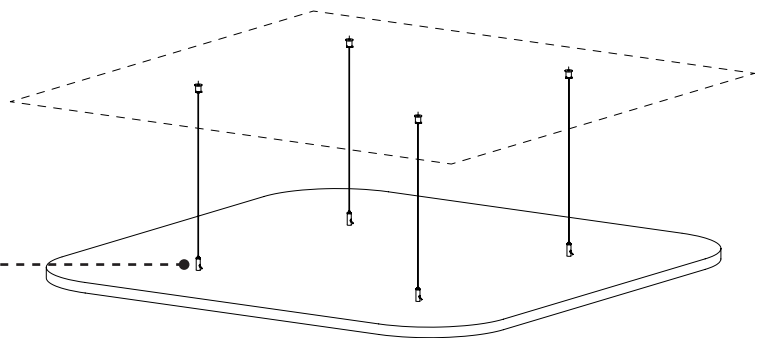

ARCHISONIC®

Colors

 Material brochure available



Name	Snow White	Milk	Cloud	Smoke	Ground	Charcoal	Slate	Raven
Color Code	500	404	103	442	108	542	444	550
NCS Code	S 0300-N	S 0502-Y	S 1002-B	S 3005-R80B	S 5005-Y20R	S 7502-B	S 4500-N	S 8500-N



Name	Nordic Pine	Grove	Moss	Spearmint	Ice Blue	Succulent	Deep Sea	Marine Blue
Color Code	311	317	439	706	304	712	918	864
NCS Code	S 5030-G10Y	S 7020-G30Y	S 2040-G40Y	S 1010-B90G	S 0510-B	S 3020-B30G	S 5020-R90B	S 4050-R70B



Name	Linen	Shell Pink	Jute	Warm Stone	Terracotta	Soft Coral	Honeycomb	Sunshine
Color Code	107	102	920	105	239	516	139	846
NCS Code	S 1505-Y30R	S 0510-R30B	S 3010-Y30R	S 3010-Y50R	S 4040-Y70R	S 2020-Y90R	S 2050-Y20R	S 1040-Y10R



Name	Garnet	Hot Pink	Poster Red	Electric Orange	Winter Sky	Pacific Ocean	Midnight	Grape
Color Code	724	140	662	464	311	432	810	540
NCS Code	S 5040-R10B	S 2060-R20B	S 1080-R	S 0580-Y70R	S 5030-G10Y	S 3040-B	S 7020-R70B	S 5040-R40B

These NCS codes are the closest visual match available and may not be exact to blended fibres.

ARCHISONIC®

Colors

Experience our ARCHISONIC® Felt material with a stunning selection of 32 colors across 8 distinct families, thoughtfully curated by *Colour Hive* in London. Effortlessly combine colors harmoniously to suit your preferences. Discover more in our Materials brochure and order your free sample box today.

Color fastness

Class 6

ISO 105-B02:A1

Order a free sample box



ARCHISONIC® Felt

Material Specification

Product Name	Archisonic® Felt	
Content	100% PET (60% certified post-consumer content)	
Thickness¹	12mm (0.47")	24mm (0.94")
Max. Size	1200x2800mm (47"x110")	1800x2400mm (70"x94")
Acoustic²	ASTM: NRC=0.6 ISO: α_w =0.65	ASTM: NRC=0.9 ISO: α_w =0.95
Density¹	2400 g/m ² (0.49 lbs/ sqft)	4000 g/m ² (0.82 lbs/sqft)
Color Fastness	Class 6 ISO 105-B02:A1	
Color	32 colors (see Archisonic® Felt Color page for more information)	
Maintenance	For daily cleaning we recommend alcohol solution (75%), e.g. Pantasept. In case of contamination by dust or fluff, use feather duster or a regular vacuum cleaner. For heavy dirt, treat the material with hydrogen peroxide.	
Lead time³	21 days	
Fire Rating	DIN EN 13501-1: B-s1, d0	ASTM E84 Class A
VOC Emission	28 Days French Regulation A+ ASTM E84 Pass Bream® (International, UK, NL, SE, NOR) Exemplary CDPH (CDPH/EHLB/Standard Method V1.2) Pass	
Certifications	Declare label, Cradle to Cradle, UL Environmental Product Declaration, Member of US Green Building Council, Ecobau 1st Priority, Climmate-KIC, VOC emissions in LEED EQ credit (low-emitting products), SCS Recycled Content	
Durability	Contract	

1 - all values are nominal 2 - measured with 300mm air cavity 3 - depending on the location and type of product



Climate-KIC is supported by the EIT, a body of the European Union



Declare.




Web, Bubble, Forest and Jungle

Acoustic Performance



Testing Standards


ISO 354:2003	Acoustics — Measurement of sound absorption in a reverberation room
ISO 11654:1997	Acoustics — Sound absorbers for use in buildings — Rating of sound absorption
ISO 20189:2018	Acoustics — Screens, furniture and single objects intended for interior use — Rating of sound absorption and sound reduction of elements based on laboratory measurements
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests

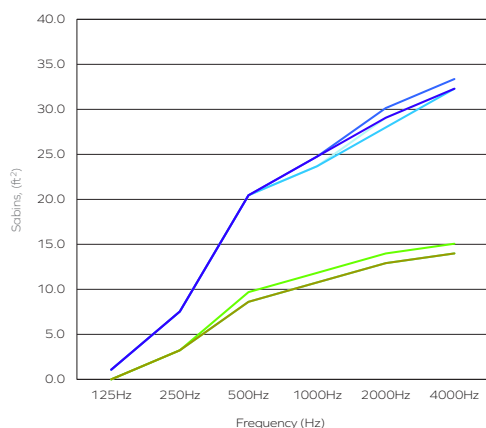

Acoustic Performance - ASTM Sabins, ft²

Frequency (Hz)	125	250	500	1000	2000	4000
24mm Round Bubbles D1200mm	0.00	3.23	8.61	10.76	12.92	13.99
24mm Round Bubbles D1800mm	1.08	7.53	20.45	23.68	29.06	32.29
24mm Round Web D1200mm	0.00	3.23	8.61	10.76	12.92	13.99
24mm Round Web D1800mm	1.08	7.53	20.45	23.68	27.99	32.29
24mm Forest D1200	0.00	3.23	9.69	11.84	13.99	15.07
24mm Forest D1800	1.08	7.53	20.45	24.76	30.14	33.37
24mm Round Jungle D1200mm	0.00	3.23	8.61	10.76	12.92	13.99
24mm Round Jungle D1800mm	1.08	7.53	20.45	24.76	29.06	32.29

The graph represents the Sabins (ft²) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.

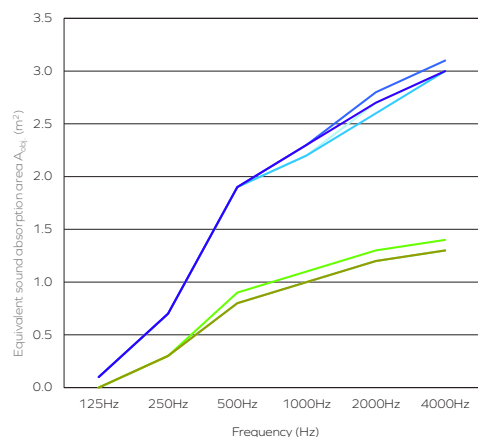

Acoustic Performance - ISO A_{obj}, m²

Frequency (Hz)	125	250	500	1000	2000	4000
24mm Round Bubbles D1200mm	0.0	0.3	0.8	1.0	1.2	1.3
24mm Round Bubbles D1800mm	0.1	0.7	1.9	2.2	2.7	3.0
24mm Round Web D1200mm	0.0	0.3	0.8	1.0	1.2	1.3
24mm Round Web D1800mm	0.1	0.7	1.9	2.2	2.6	3.0
24mm Forest D1200	0.0	0.3	0.9	1.1	1.3	1.4
24mm Forest D1800	0.1	0.7	1.9	2.3	2.8	3.1
24mm Round Jungle D1200mm	0.0	0.3	0.8	1.0	1.2	1.3
24mm Round Jungle D1800mm	0.1	0.7	1.9	2.3	2.7	3.0

The graph represents the equivalent sound absorption per object (A_{obj}) in the third octave band center frequencies. Measurement used Pink Noise as excitation signal in a reverberant room.

- 24mm Round Bubbles D1200mm
- 24mm Round Web D1200mm
- 24mm Forest D1200
- 24mm Round Jungle D1200mm
- 24mm Round Bubbles D1800mm
- 24mm Round Web D1800mm
- 24mm Forest D1800
- 24mm Round Jungle D1800mm

Acoustic Test Results


	α_w	SAA	NRC
24mm Ceiling Panel 1800x2400mm ¹	0.75 (MH)	0.85	0.85
12mm Ceiling Panel 1200x2800mm ¹	0.65 (H)	0.74	0.75
24mm Ceiling Panel 1800x2400mm ²	0.55 (MH)	0.72	0.70

1 - Measured with 200mm airgap and open edges

2 - Measured with 200mm airgap, open edges and 18% perforation

Web, Bubble and Forest

Reference Projects

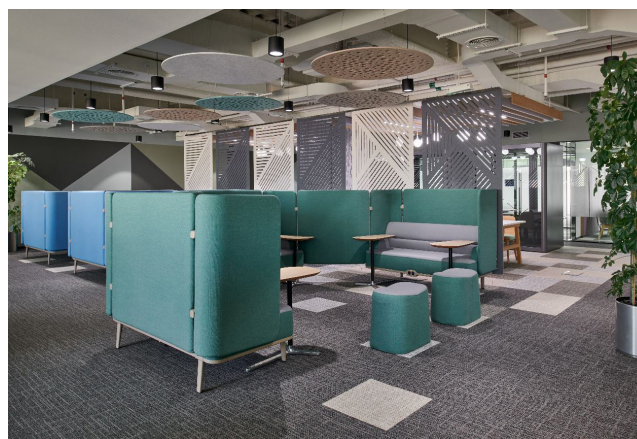

Web, Bubble and Forest

Additional Information

Online Resources

A variety of resources are available online for all of our products. Please visit the product's page for more information.



CAD files



Spec sheets and
Installation Guide



Color families



Instruction
videos



Associated
products specs.

Ordering Process

Our experienced team of Project Consultants will guide and support you throughout the order process. We fulfill the majority of our orders in as little as 21 days¹ from your first point of contact, allowing you to focus on what truly matters to you.



Contact our
consultant

Quote¹

48h



Order Confirmation

Production¹

14-21 days



Dispatch

Transit

location based



Delivery

Contact Us

Ready to make an impact? We are just an email or call away to discuss your project and answer any question.




+41 41 566 55 55



connect@impactacoustic.com



Online form

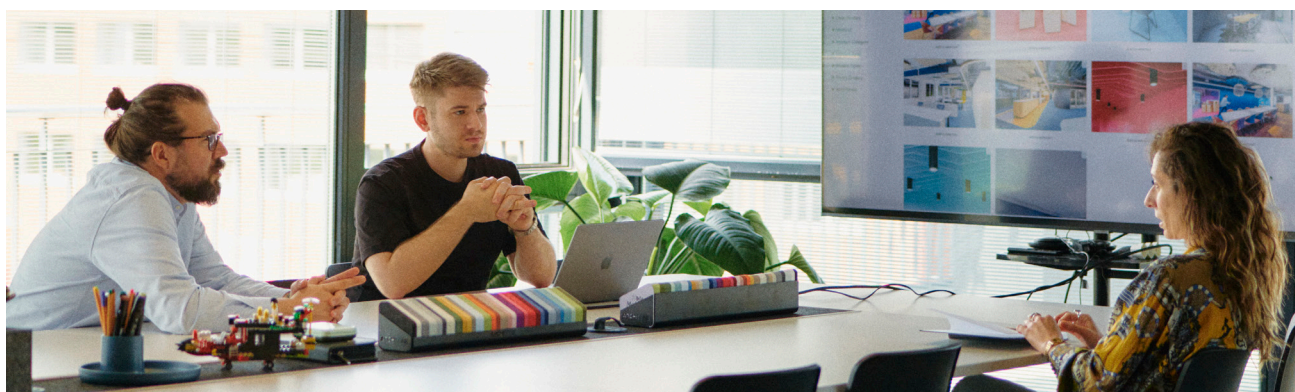

¹ - Quote and Production times may vary.

**#We
Make An
Impact**

connect@impactacoustic.com | www.impactacoustic.com